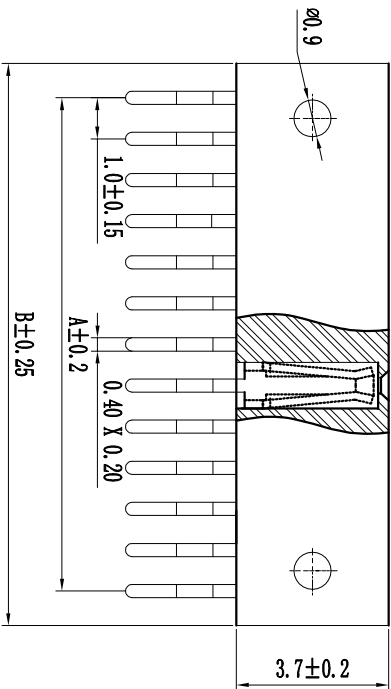
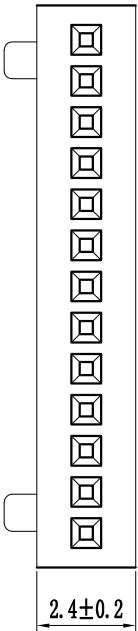


技术规范:

额定电流 : 1AMP

适用温度 : -40°C to +105°C

接触电阻 : 20mΩ Max

绝缘电阻 : 1000MΩ Min

耐电压 : AC 500V


绝缘材料 : Polyester (UL94V-0)

Standard: PA-6T

端子材质 : Bronze

电镀规范 : Au or Sn Over 50u" Ni

Pin 号	尺寸 A	尺寸 B
1x2	1.00	2.40
1x3	2.00	3.40
1x4	3.00	4.40
1x5	4.00	5.40
1x6	5.00	6.40
1x7	6.00	7.40
1x8	7.00	8.40
1x9	8.00	9.40
1x10	9.00	10.40
1x11	10.00	11.40
1x12	11.00	12.40
1x13	12.00	13.40
1x14	13.00	14.40
1x15	14.00	15.40
1x16	15.00	16.40
1x17	16.00	17.40
1x18	17.00	18.40
1x19	18.00	19.40
1x20	19.00	20.40
1x21	20.00	21.40
1x22	21.00	22.40
1x23	22.00	23.40
1x24	23.00	24.40
1x25	24.00	25.40
1x26	25.00	26.40
1x27	26.00	27.40
1x28	27.00	28.40
1x29	28.00	29.40
1x30	29.00	30.40
1x31	30.00	31.40
1x32	31.00	32.40
1x33	32.00	33.40
1x34	33.00	34.40
1x35	34.00	35.40
1x36	35.00	36.40
1x37	36.00	37.40
1x38	37.00	38.40
1x39	38.00	39.40
1x40	39.00	40.40
1x41	40.00	41.40
1x42	41.00	42.40
1x43	42.00	43.40
1x44	43.00	44.40
1x45	44.00	45.40
1x46	45.00	46.40
1x47	46.00	47.40
1x48	47.00	48.40
1x49	48.00	49.40
1x50	49.00	50.40

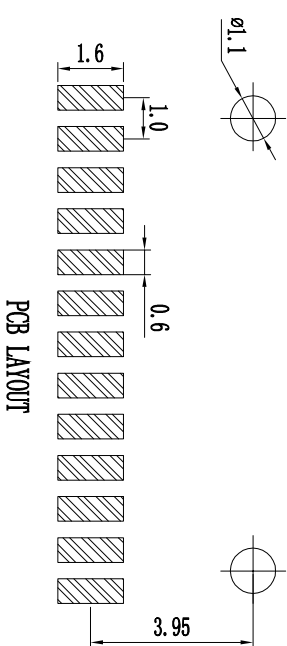

F a-10-1-2-5p-a-a-s-D-0									
材料系列	间距	插孔	单排	Pin 数	长度	材质	角度	端子	备注
a-0.0mm	1.0mm	1-单排	1-单排	10	1.0mm	PA-6T	S=180°	12.5mm 间距 25	1-3.0/0.6 (双排)
b-1.0mm	1.0mm	2-双排	2-双排	20	2.0mm	PA-6T	R=90°	11.0mm 间距 16	1-3.0/0.6 (双排)
c-1.27mm	1.27mm	3-三排	3-三排	30	3.0mm	PA-6T	C=165°	12.5mm 间距 22	2-3.0/0.3 (双排)
d-2.0mm	2.0mm	4-四排	4-四排	40	4.0mm	PA-6T	D=104°	14.5mm 间距 28	2-3.0/0.3 (双排)
e-2.5mm	2.5mm				5.0mm	PA-6T	E=135°	16.5mm 间距 34	2-3.0/0.3 (双排)
f-3.0mm	3.0mm				6.0mm	PA-6T	F=150°	18.5mm 间距 40	2-3.0/0.3 (双排)
h-5.0mm	5.0mm				10.0mm	PA-6T	H=180°	22.5mm 间距 50	2-3.0/0.3 (双排)

注: 本规格以英寸计

TOLERANCE:

X. ±XXX

X. ±0.20

XX ±0.10

ANG.

STG

上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION

姓名

日期

审核

日期

客戶確認

日期

日期

Spec: 1.00mm 单排母, DIP, 塑高3.7mm

Position: 1X1*1X50

Plastics Height: 3.70mm