

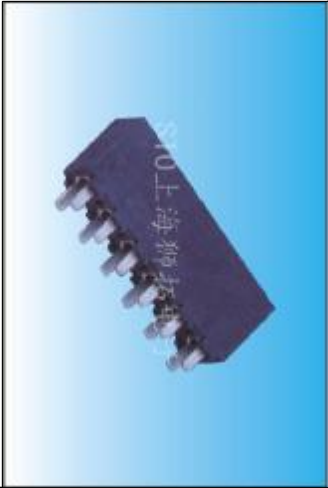
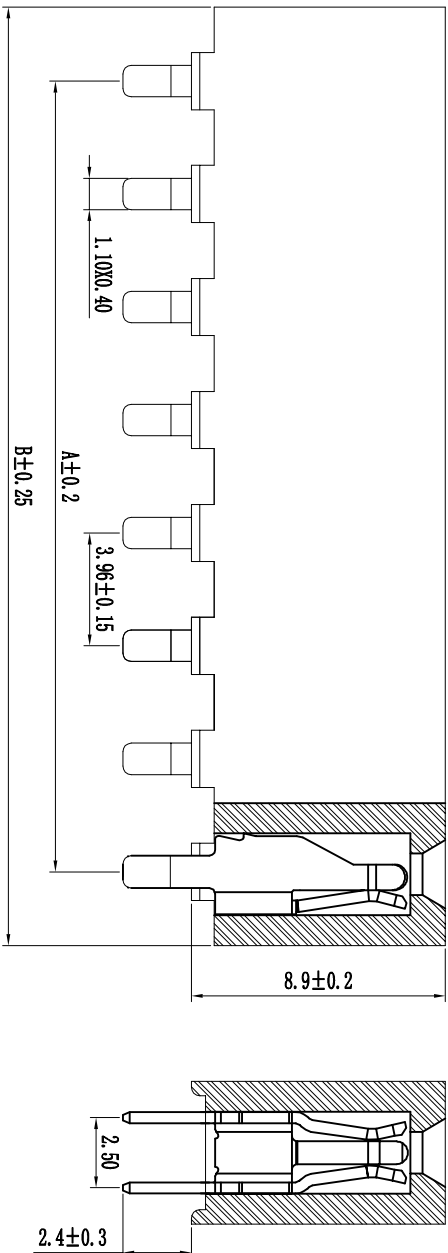


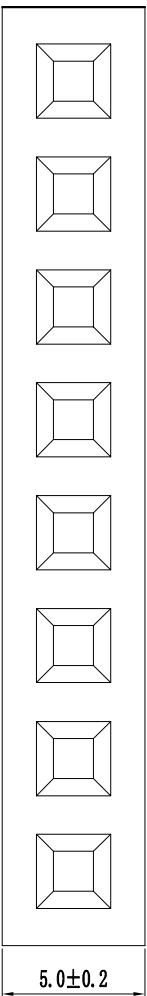

技术规范:

额定电流 : 3AMP
适用温度 : -40°C to +105°C
接触电阻 : 20mΩ Max
绝缘电阻 : 1000MΩ Min
耐电压 : AC 1000V
绝缘材料 : Polyester (UL94V-0)
Standard: PBT
端子材质 : Bronze
电镀规范 : Au or Sn Over 50u" Ni

Pin#	尺寸a	尺寸b
1x2	3.96	7.92
1x3	7.92	11.88
1x4	11.88	15.84
1x5	15.84	19.80
1x6	19.80	23.76
1x7	23.76	27.72
1x8	27.72	31.68
1x9	31.68	35.64
1x10	35.64	39.60
1x11	39.60	43.56
1x12	43.56	47.52
1x13	47.52	51.48
1x14	51.48	55.44
1x15	55.44	59.40
1x16	59.40	63.36
1x17	63.36	67.32
1x18	67.32	71.28
1x19	71.28	75.24
1x20	75.24	79.20
1x21	79.20	83.16
1x22	83.16	87.12
1x23	87.12	91.08
1x24	91.08	95.04
1x25	95.04	99.00
1x26	99.00	102.96
1x27	102.96	106.92
1x28	106.92	110.88
1x29	110.88	114.84
1x30	114.84	118.80
1x31	118.80	122.76
1x32	122.76	126.72
1x33	126.72	130.68
1x34	130.68	134.64
1x35	134.64	138.60
1x36	138.60	142.56
1x37	142.56	146.52
1x38	146.52	150.48
1x39	150.48	154.44
1x40	154.44	158.40

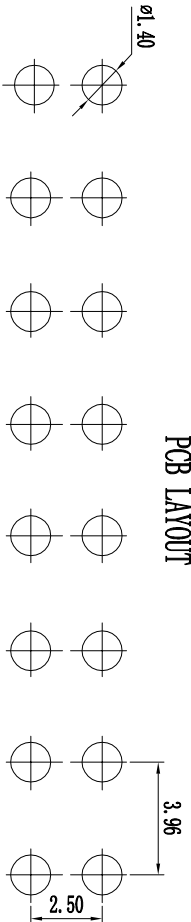

F a-10-1-2-5p-a-a-s-D-0									
焊盘系列	间距	通孔	双排	单排	Pin数	电镀	材质	角度	端子
a-0.0mm			1-单排	1-单排	1"40P/50P	B-1u"	A-70P	S-180°	12.5mm间距25
b-1.0mm			2-双排	2-双排	2"40P/50P	B-5u"	B-70P	R-90°	11.0mm间距18
c-1.27mm			3-二排	3-三排	3"40P/50P	C-5u"	C-70P	R-90°	12.5mm间距22
d-2.0mm			4-四排		4"40P/50P	D-10u"	D-70P	L-45°	100-非焊接端子
e-2.5mm						B-15u"	B-12P	L-135°	100-非焊接端子
f-3.0mm						F-50u"			100-非焊接口端子
h-5.08mm						R-5-分脚			其它分脚规格
									注: 本规格以原厂计

TOLERANCE:		客户确认	
X. ±XXX		姓名	日期
X. ±0.20		审核	日期
XX ±0.10		日期	日期
ANG.		☐ 承辦 ☐ 退回	
產品料號:		THIRD ANGLE PROJECTION	
產品名稱:		日期	
STC		上海狮拓电子科技有限公司	