

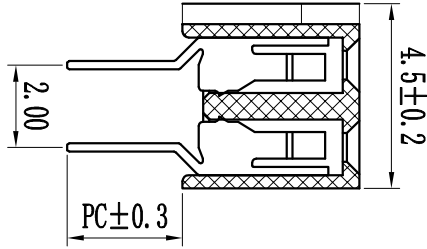


PC	H
2.4	4.0
2.8	4.3
	4.6

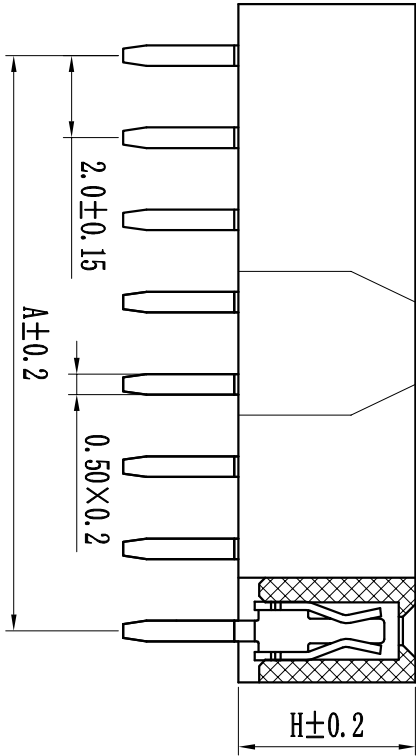

技术规范:
额定电流 : 1.5AMP
适用温度 : -40°C to +105°C
接触电阻 : 20mΩ Max
绝缘电阻 : 1000MΩ Min
耐电压 : AC 500V
绝缘材料 : Polyester (UL94V-0)
Standard: PA-6T
端子材质 : Bronze
电镀规范 : Au or Sn Over 50u" Ni

Pin 数	尺寸A	尺寸B
2x2	2.0	4.5
2x3	4.0	6.5
2x4	6.0	8.5
2x5	8.0	10.5
2x6	10.0	12.5
2x7	12.0	14.5
2x8	14.0	16.5
2x9	16.0	18.5
2x10	18.0	20.5
2x11	20.0	22.5
2x12	22.0	24.5
2x13	24.0	26.5
2x14	26.0	28.5
2x15	28.0	30.5
2x16	30.0	32.5
2x17	32.0	34.5
2x18	34.0	36.5
2x19	36.0	38.5
2x20	38.0	40.5
2x21	40.0	42.5
2x22	42.0	44.5
2x23	44.0	46.5
2x24	46.0	48.5
2x25	48.0	50.5
2x26	50.0	52.5
2x27	52.0	54.5
2x28	54.0	56.5
2x29	56.0	58.5
2x30	58.0	60.5
2x31	60.0	62.5
2x32	62.0	64.5
2x33	64.0	66.5
2x34	66.0	68.5
2x35	68.0	70.5
2x36	70.0	72.5
2x37	72.0	74.5
2x38	74.0	76.5
2x39	76.0	78.5
2x40	78.0	80.5

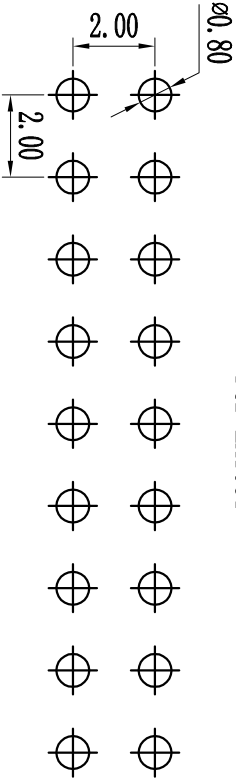

F	a	10	1	2	5p	a	a	a	s	D	0
焊盘系列	间距	间距	间距	间距	间距	间距	间距	间距	间距	间距	间距
a=0.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm
b=1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm
c=1.27mm	1.27mm	1.27mm	1.27mm	1.27mm	1.27mm	1.27mm	1.27mm	1.27mm	1.27mm	1.27mm	1.27mm
d=2.0mm	2.0mm	2.0mm	2.0mm	2.0mm	2.0mm	2.0mm	2.0mm	2.0mm	2.0mm	2.0mm	2.0mm
e=2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm
f=3.0mm	3.0mm	3.0mm	3.0mm	3.0mm	3.0mm	3.0mm	3.0mm	3.0mm	3.0mm	3.0mm	3.0mm
h=5.0mm	5.0mm	5.0mm	5.0mm	5.0mm	5.0mm	5.0mm	5.0mm	5.0mm	5.0mm	5.0mm	5.0mm

STC 上海狮拓电子科技有限公司

TOLERANCE:		客户确认
X. ±XXX		日期: _____
X. ±0.20		日期: _____
XX ±0.10		日期: _____
ANG.	产品名称:	日期: _____
	产品料号:	日期: _____
	THIRD ANGLE PROJECTION	日期: _____

2.0mm双排母, DIP, 塑高4.0/4.3/4.6mm 带凸宽4.5mm
Spec: 2.0mm Female Header, Dual Row, Straight
Positions: 2X2'2X40
Plastics Height: 4.0/4.3/4.6mm