
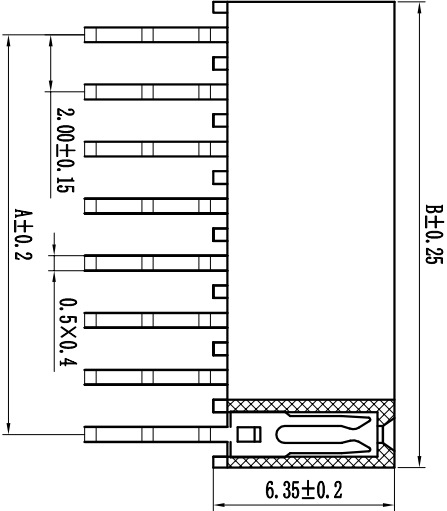
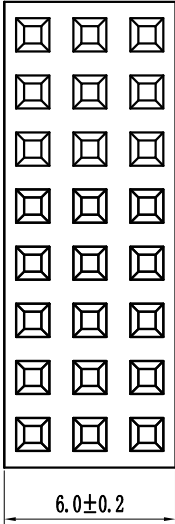


技术规范:

额定电流 : 1.5AMP

适用温度 : -40℃to+105℃

接触电阻 : 20mΩ Max

绝缘电阻 : 1000MΩ Min

耐电压 : AC 500V

绝缘材料 : Polyester (UL94V-0)

Standard:PA-6T

端子材质 : Bronze

电镀规范 : Au or Sn Over 50u" Ni

Pin#	尺寸A	尺寸B
3×3	4.0	6.3
3×4	6.0	8.3
3×5	8.0	10.3
3×6	10.0	12.3
3×7	12.0	14.3
3×8	14.0	16.3
3×9	16.0	18.3
3×10	18.0	20.3
3×11	20.0	22.3
3×12	22.0	24.3
3×13	24.0	26.3
3×14	26.0	28.3
3×15	28.0	30.3
3×16	30.0	32.3
3×17	32.0	34.3
3×18	34.0	36.3
3×19	36.0	38.3
3×20	38.0	40.3
3×21	40.0	42.3
3×22	42.0	44.3
3×23	44.0	46.3
3×24	46.0	48.3
3×25	48.0	50.3
3×26	50.0	52.3
3×27	52.0	54.3
3×28	54.0	56.3
3×29	56.0	58.3
3×30	58.0	60.3
3×31	60.0	62.3
3×32	62.0	64.3
3×33	64.0	66.3
3×34	66.0	68.3
3×35	68.0	70.3
3×36	70.0	72.3
3×37	72.0	74.3
3×38	74.0	76.3
3×39	76.0	78.3
3×40	78.0	80.3

P a-10-1-2-5p-a-a-s-D-0									
材料类别	间距	插孔	双排	单排	Pin数	长度	材质	角度	端子
a-0.0mm			1-单排	1-单排	1"40P/50P	B-10"	A-70P	S-180°	12.5mm间距25
b-1.0mm			2-双排	2-双排	2"40P/50P	B-50"	B-70P/60	R-90°	11.0mm间距18
c-1.27mm			3-三排	3-三排	3"40P/50P	C-50"	C-70P/60	R-90°	12.5mm间距22
d-2.0mm			4-四排	4-四排	4"40P/50P	D-100"	D-70P/60	L-45°	100-非焊接端子
e-2.5mm						B-150"	B-112P	L-135°	100-非焊接端子
f-3.0mm						F-400"			100-非焊接端子
h-5.0mm						H-400"			100-非焊接端子
									其它另做说明
									注: 本规格以原厂计



上海狮拓电子科技有限公司

客户确认

2.0mm三排母, 90°, 塑高6.35mm

Spec: 2.0mm Female Header, Triple Row, Right Angle

Positions: 3×3 3×40

Plastics Height: 6.35mm

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.

产品名称:

产品料号:

THIRD ANGLE PROJECTION

