
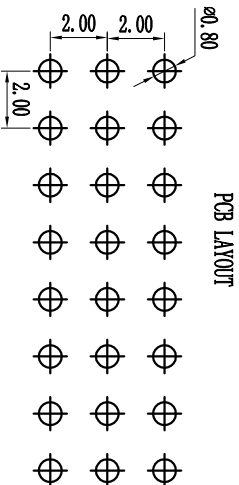
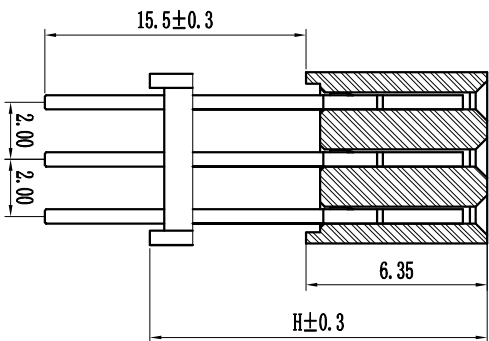
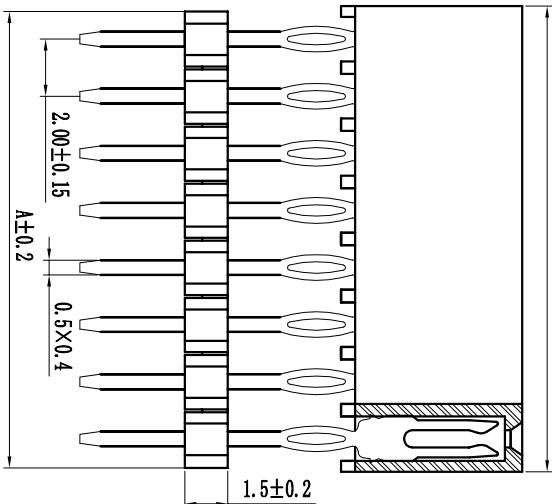


A	Pin数	尺寸A	尺寸B
	3×3	4.0	6.3
	3×4	6.0	8.3
	3×5	8.0	10.3
	3×6	10.0	12.3
	3×7	12.0	14.3
	3×8	14.0	16.3
	3×9	16.0	18.3
	3×10	18.0	20.3
	3×11	20.0	22.3
	3×12	22.0	24.3
	3×13	24.0	26.3
	3×14	26.0	28.3
	3×15	28.0	30.3
	3×16	30.0	32.3
	3×17	32.0	34.3
	3×18	34.0	36.3
	3×19	36.0	38.3
	3×20	38.0	40.3
	3×21	40.0	42.3
	3×22	42.0	44.3
	3×23	44.0	46.3
	3×24	46.0	48.3
	3×25	48.0	50.3
	3×26	50.0	52.3
	3×27	52.0	54.3
	3×28	54.0	56.3
	3×29	56.0	58.3
	3×30	58.0	60.3
	3×31	60.0	62.3
	3×32	62.0	64.3
	3×33	64.0	66.3
	3×34	66.0	68.3
	3×35	68.0	70.3
	3×36	70.0	72.3
	3×37	72.0	74.3
	3×38	74.0	76.3
	3×39	76.0	78.3
	3×40	78.0	80.3

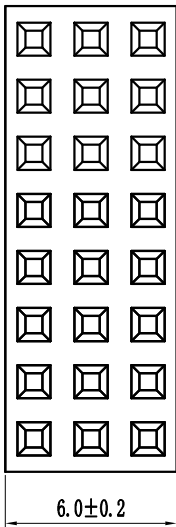

技术规范:
额定电流 : 1.5AMP
适用温度 : -40℃to+105℃
接触电阻 : 20mΩ Max
绝缘电阻 : 1000MΩ Min
耐电压 : AC 500V
绝缘材料 : Polyester (UL94V-0)
Standard:PA-6T
端子材质 : Bronze
电镀规范 : Au or Sn Over 50u" Ni

F a-10-1-2-5p-a-a-s-D-0									
材料类别	间距	插孔	双排	单排	Pin数	长度	材质	角度	端子
a-0.8mm			1-单排	1-单排	1"40P/50P	B-11u"	A-PA6T	S-180°	12.5mm间距25
b-1.0mm			2-双排	2-双排	2"40P/50P	B-3u"	B-PA6T	R-90°	11.0mm间距18
c-1.27mm			3-三排	3-三排	3"40P/50P	C-5u"	C-PA6T	R-90°	12.5mm间距22
d-2.0mm			4-四排	4-四排	4"40P/50P	D-10u"	D-PA6T	L-45°	12.5mm间距22
e-2.5mm						B-15u"	B-12P	L-45°	12.5mm间距22
f-2.54mm						F-15u"	F-15u"	L-45°	12.5mm间距22
f-3.0mm						F-3.0mm	F-3.0mm	L-45°	12.5mm间距22
h-5.08mm						H-5.08mm	H-5.08mm	L-45°	12.5mm间距22

STC 上海狮拓电子科技有限公司

TOLERANCE:	
X	±XXX
X	±0.20
XX	±0.10
ANG.	

THIRD ANGLE PROJECTION

姓名: _____ 日期: _____
审核: _____ 日期: _____
客户确认: _____
日期: _____

2.0mm三排母, 180°, 塑高6.35±1.5mm
Spec: 2.0mm Female Header, Triple Row, Straight
Positions: 3×3 3×40
Plastics Height: 6.35±1.5mm