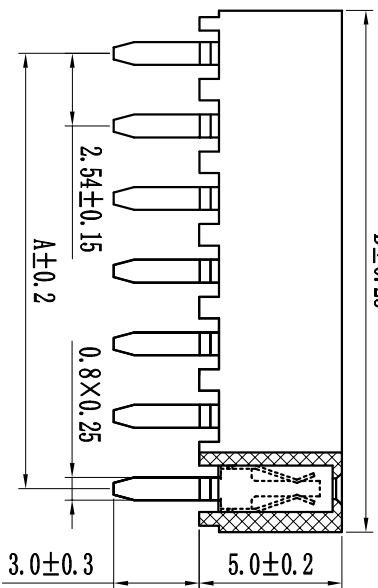
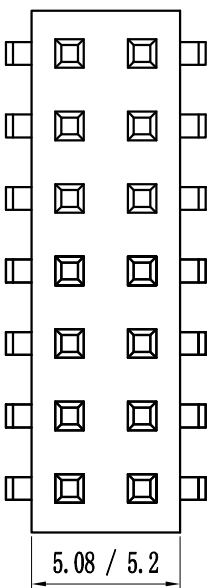


技术规范:

额定电流 : 3AMP

适用温度 : -40℃to+105℃

接触电阻 : 20mΩ Max

绝缘电阻 : 1000MΩ Min

耐电压 : AC 1000V


绝缘材料 : Polyester (UL94V-0)

Standard:PBT

端子材质 : Bronze

电镀规范 : Au or Sn Over 50u" Ni

Pin#	尺寸A	尺寸B
2×2	2.54	5.48
2×3	5.08	8.02
2×4	7.62	10.56
2×5	10.16	13.10
2×6	12.70	15.64
2×7	15.24	18.18
2×8	17.78	20.72
2×9	20.32	23.26
2×10	22.86	25.80
2×11	25.40	28.34
2×12	27.94	30.88
2×13	30.48	33.42
2×14	33.02	35.96
2×15	35.56	38.50
2×16	38.10	41.04
2×17	40.64	43.58
2×18	43.18	46.12
2×19	45.72	48.66
2×20	48.26	51.20
2×21	50.80	53.74
2×22	53.34	56.28
2×23	55.88	58.82
2×24	58.42	61.36
2×25	60.96	63.90
2×26	63.50	66.44
2×27	66.04	68.98
2×28	68.58	71.52
2×29	71.12	74.06
2×30	73.66	76.60
2×31	76.20	79.14
2×32	78.74	81.68
2×33	81.28	84.22
2×34	83.82	86.76
2×35	86.36	89.30
2×36	88.90	91.84
2×37	91.44	94.38
2×38	93.98	96.92
2×39	96.52	99.46
2×40	99.06	102.00

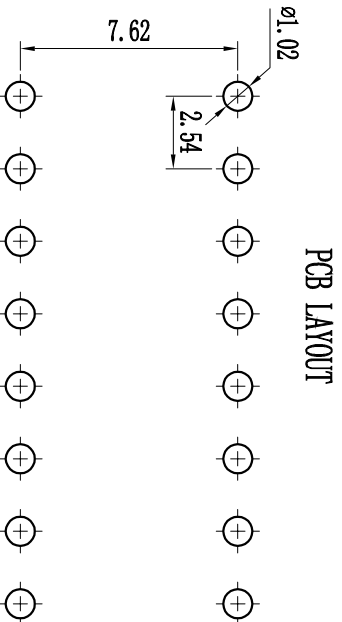

F a-10-1-2-5p-a-a-s-D-0									
排针系列	间距	插孔	双排	单排	Pin数	长度	材质	角度	端子
a-0.0mm			1-单排	1-单排	1"40P/50P	a-1u"	A-70P	S-180°	12.5mm间距25
b-1.0mm			2-双排	2-双排	2"40P/50P	B-5u"	B-74P/65	R-90°	11.0mm间距18
c-1.27mm			3-三排	3-三排	3"40P/50P	C-5u"	C-74P/65	R-90°	12.5mm间距22
d-2.0mm			4-四排	4-四排	4"40P/50P	D-10u"	D-74P/65	L-45°	100°-非标准端子
e-2.5mm						B-15u"	B-12P	L-135°	4-2.0/2.5(双排)
f-3.0mm						F-30u"			100°-非标准端子
h-5.0mm						H-50u"			100°-非标准端子
						R-半全插			其它另做说明
									注: 本规格以材料计

STG

上海狮拓电子科技有限公司

TOLERANCE:

X. ±0.05

XX ±0.10

ANG.

产品名称:

产品料号:

THIRD ANGLE PROJECTION

客户确认

2.54mm双排母, 焊盘脚, 塑高5.0mm U型端子

Spec: 2.54mm Female Header, Dual Row , Btron Entry

Positions: 2×32×40

Plastics Height: 5.0mm