
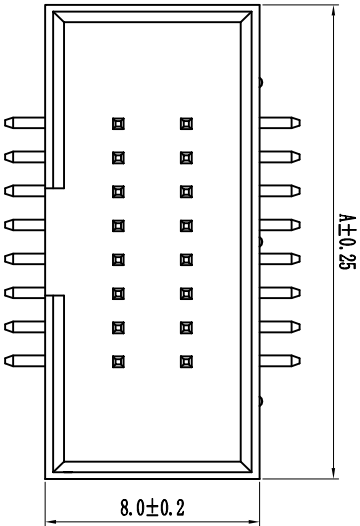


技术规范:

额定电流：1AMP
适用温度：-40℃to+105℃
接触电阻：20mΩ Max
绝缘电阻：1000MΩ Min
耐电压：AC500V
绝缘材料：Polyester (UL94V-0)
Standard:PA-6T
端子材质：Brass
电镀规范：Au or Sn Over 50u" Ni

Pin#	尺寸A	尺寸B
2x5	13.9	6.35
2x6	15.17	7.62
2x7	16.44	8.89
2x8	17.71	10.16
2x9	18.98	11.43
2x10	20.25	12.70
2x11	21.52	13.97
2x12	22.79	15.24
2x13	24.06	16.51
2x14	25.33	17.78
2x15	26.60	19.05
2x16	27.87	20.32
2x17	29.14	21.59
2x18	30.41	22.86
2x19	31.68	24.13
2x20	32.95	25.40
2x21	34.22	26.67
2x22	35.49	27.94
2x23	36.76	29.21
2x24	38.03	30.48
2x25	39.30	31.75
2x26	40.57	33.02
2x27	41.84	34.29
2x28	43.11	35.56
2x29	44.38	36.83
2x30	45.65	38.10
2x31	46.92	39.37
2x32	48.19	40.64
2x33	49.46	41.91
2x34	50.73	43.18
2x35	52.00	44.45
2x36	53.27	45.72
2x37	54.54	46.99
2x38	55.81	48.26
2x39	57.08	49.53
2x40	58.35	50.80
2x41	59.62	52.07
2x42	60.89	53.34
2x43	62.16	54.61
2x44	63.43	55.88
2x45	64.70	57.15
2x46	65.97	58.42
2x47	67.24	59.69
2x48	68.51	60.96
2x49	69.78	62.23
2x50	71.05	63.50

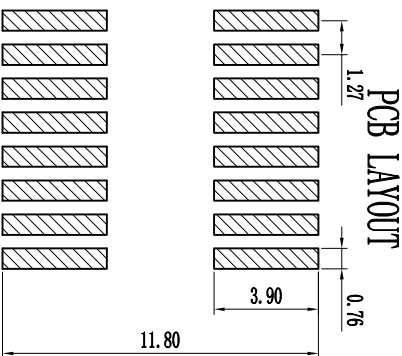

F a-10-1-2-5p-a-a-s-D-0									
接插系列	间距	插孔	双排	单排	Pin数	长度	材质	角度	端子
a-0.0mm			1-单排	1-单排	1"40P/50P	B-10"	A-70T	S-180°	12.5mm间距25
b-1.0mm			2-双排	2-双排	2"40/50P	B-30"	B-70T45	R-90°	11.0mm间距16
c-1.27mm			3-三排	3-三排	3"40/50P	C-50"	C-70T	R-90°	12.5mm间距22
d-2.0mm			4-四排	4-四排	4"40/50P	D-100"	D-70T	L-45°	100-非标准端子
e-2.5mm						B-150"	B-10P	L-135°	100-非标准端子
f-3.0mm						F-300"	S-直插		100-非密封口端子
h-5.0mm						B-半全插			其它另做说明
									注：本插针以插针计

TOLERANCE:		客户确认	
X. ±XXX		姓名: _____ 日期: _____ □ 承辦 _____ 日期: _____ □ 撤回 _____ 日期: _____	
X. ±0.20			
XX ±0.10	產品名稱:	1.27X2.54间距奶牛 SMT, 鍍高5.6mm Spec: 1.27X2.54mm Box Header, Straight Positions: 10~100 Plastic Height: 5.4mm	
ANG.	產品料號:	THIRD ANGLE PROJECTION	

STO 上海狮拓电子科技有限公司