



Pin数	尺寸A	尺寸B
2×6	6.35	22.12
2×8	8.89	24.66
2×10	11.43	27.20
2×12	13.97	29.74
2×14	16.51	32.28
2×16	19.05	34.82
2×18	21.59	37.36
2×20	24.13	39.90
2×22	26.67	42.44
2×24	29.21	44.98
2×26	31.75	47.52
2×28	34.29	50.06
2×30	36.83	52.60
2×32	39.37	55.14
2×34	41.91	57.68
2×36	44.45	60.22
2×38	46.99	62.76
2×40	49.53	65.30
2×42	52.07	67.84
2×44	54.61	70.38
2×46	57.15	72.92
2×48	59.69	75.46
2×50	62.23	78.00
2×52	64.77	80.54
2×54	67.31	83.08
2×56	69.85	85.62
2×58	72.39	88.16
2×60	74.93	90.70



技术规范:

额定电流 : 1AMP

适用温度 : -40℃to+105℃

接触电阻 : 20mΩ Max

绝缘电阻 : 1000MΩ Min



耐电压 : AC 500V

绝缘材料 : Polyester (UL94V-0)


Standard:PBT

端子材质 : Brass

电镀规范 : Au or Sn Over 50u" Ni

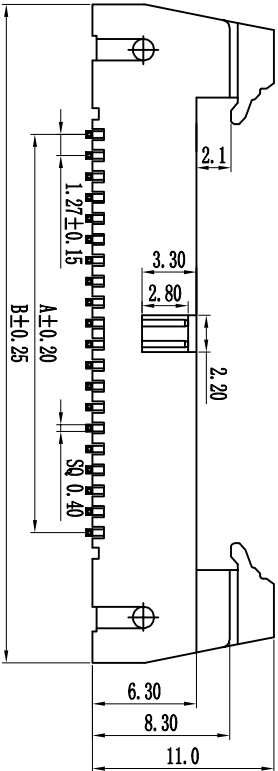

PCB LAYOUT

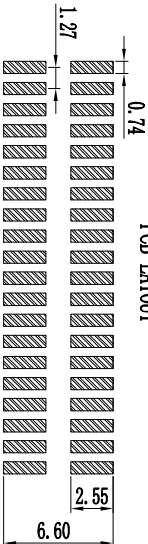

F a-10-1-2-5p-a-a-s-D-0									
排针系列	间距	插孔	双排	单排	Pin数	长度	材质	角度	端子
a-0.6mm			1-单排	1-单排	1"40P/50P	A-10"	A70PBT	S=180°	12.5mm间距25
b-1.0mm			2-双排	2-双排	2"40P/50P	B-50"	B70P40	R=90°	11.0mm间距18
c-1.27mm			3-三排	3-三排	3"40P/50P	C-50"	C70P40	R=90°	12.5mm间距22
d-2.0mm			4-四排	4-四排	4"40P/50P	D-100"	D70P40	L=180°	100-非焊接端子
e-2.5mm						B-150"	B70P40	L=180°	100-非焊接端子
f-2.54mm						F-500"	S=90°		100-非焊接口端子
f-3.0mm						S=90°			其它另做说明
h-5.08mm						B-非全插			注: 长度时以插针计

TOLERANCE:

X. ±XXX
.X ±0.20
.XX ±0.10
ANG.



上海狮拓电子科技有限公司

客户确认

姓名 _____ 日期 _____
审核 _____ 日期 _____
日期 _____
☐ 采购 _____ 日期 _____
☐ 退回 _____ 日期 _____

1.27mm间距牛角, SMT, 立高6.30mm
Spec: 1.27mm Ejector Header, Dual Row, SMT
Positions: 2×6 2×40
Plastics Height: 6.30mm

THIRD ANGLE PROJECTION

