

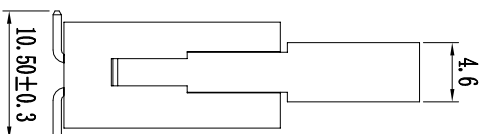


Pin#	尺寸A	尺寸B	尺寸C
2x5	10.16	21.68	31.90
2x6	12.70	24.22	34.44
2x7	15.24	26.76	36.98
2x8	17.78	29.30	39.52
2x9	20.32	31.84	42.06
2x10	22.86	34.38	44.60
2x11	25.40	36.92	47.14
2x12	27.94	39.46	49.68
2x13	30.48	42.00	52.22
2x14	33.02	44.54	54.76
2x15	35.56	47.08	57.30
2x16	38.10	49.62	59.84
2x17	40.64	52.16	62.38
2x18	43.18	54.70	64.92
2x19	45.72	57.24	67.46
2x20	48.26	59.78	70.00
2x21	50.80	62.32	72.54
2x22	53.34	64.86	75.08
2x23	55.88	67.40	77.62
2x24	58.42	69.94	80.16
2x25	60.96	72.48	82.70
2x26	63.50	75.02	85.24
2x27	66.04	77.56	87.78
2x28	68.58	80.10	90.32
2x29	71.12	82.64	92.86
2x30	73.66	85.18	95.40
2x31	76.20	87.72	97.94
2x32	78.74	90.26	100.48
2x33	81.28	92.80	103.02
2x34	83.82	95.34	105.56
2x35	86.36	97.88	108.10
2x36	88.90	100.42	110.64
2x37	91.44	102.96	113.18
2x38	93.98	105.50	115.72
2x39	96.52	108.04	118.26
2x40	99.06	110.58	120.80

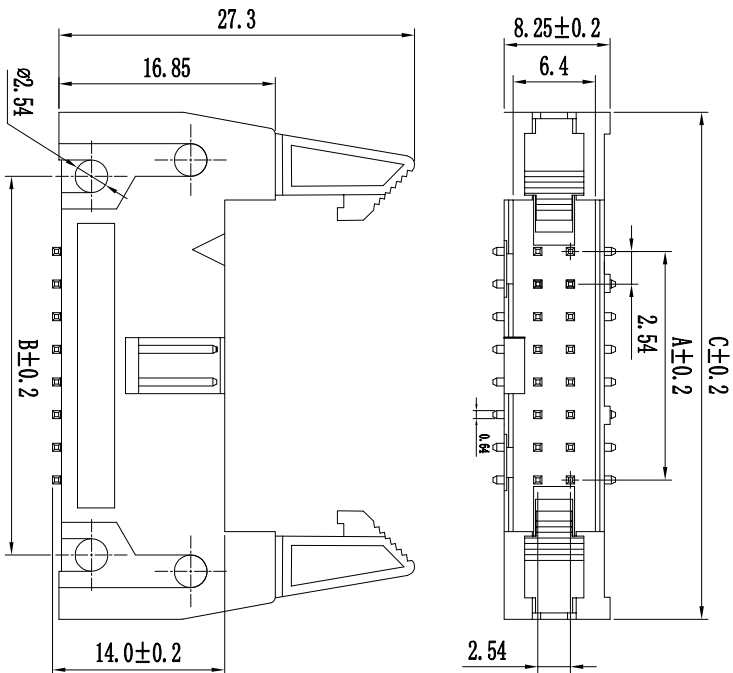

技术规范:

额定电流 : 3AMP
适用温度 : -40℃to+105℃
接触电阻 : 20mΩ Max
绝缘电阻 : 1000MΩ Min
耐电压 : AC 1000V
绝缘材料 : Polyester (UL94V-0)
Standard:PBT
端子材料 : Brass
电镀规范 : Au or Sn Over 50u" Ni



F a-10-1-2-5p-a-a-s-D-0									
焊盘系列	间距	通孔	双排	单排	Pin数	长度	材质	角度	端子
a-0.0mm			1-单排	1-单排	1"40P/50P	B-10"	A-70P	S-180°	12.5mm间距25
b-1.0mm			2-双排	2-双排	2"40P/50P	B-30"	B-70P/60	R-90°	11.0mm间距18
c-1.27mm			3-三排	3-三排	3"40P/50P	C-50"	C-70P/60	R-90°	12.5mm间距22
d-2.0mm			4-四排	4-四排	4"40P/50P	D-100"	D-70P/60	L-45°	2-2.8/4.0(双排)
e-2.5mm						B-150"	B-120"	L-135°	3-2.8/4.0(双排)
f-3.0mm						F-300"			4-2.0/2.5(双排)
h-5.08mm									其它另做说明
									1-插式SMT
									000-非密封口端子
									S-覆锡
									000-非焊面而包端子
									注: 本规格以原厂计

TOLERANCE:		客户确认	
X. ±XXX		姓名	日期
X. ±0.20		审核	日期
XX ±0.10		日期	日期
ANG.		☐ 承辦	☐ 退回
產品名稱:		THIRD ANGLE PROJECTION	
產品料號:			
上海狮拓电子科技有限公司			
2.54mm间距牛角, SMT, 立高14.0mm Spec: 2.54mm Female Header, Dual Row, SMT Positions: 2X5"2X40 Plastics Height: 14.0mm			