
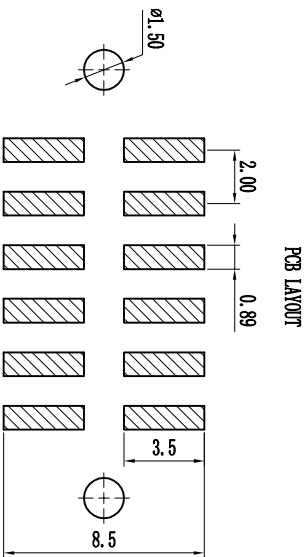

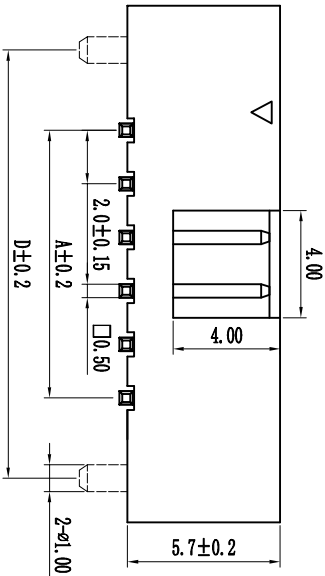



Pin#	尺寸A	尺寸B	尺寸C	尺寸D
2x3	4.00	12.20	13.50	10.00
2x4	6.00	14.20	15.50	12.00
2x5	8.00	16.20	17.50	14.00
2x6	10.00	18.20	19.50	16.00
2x7	12.00	20.20	21.50	18.00
2x8	14.00	22.20	23.50	20.00
2x9	16.00	24.20	25.50	22.00
2x10	18.00	26.20	27.50	24.00
2x11	20.00	28.20	29.50	26.00
2x12	22.00	30.20	31.50	28.00
2x13	24.00	32.20	33.50	30.00
2x14	26.00	34.20	35.50	32.00
2x15	28.00	36.20	37.50	34.00
2x16	30.00	38.20	39.50	36.00
2x17	32.00	40.20	41.50	38.00
2x18	34.00	42.20	43.50	40.00
2x19	36.00	44.20	45.50	42.00
2x20	38.00	46.20	47.50	44.00
2x21	40.00	48.20	49.50	46.00
2x22	42.00	50.20	51.50	48.00
2x23	44.00	52.20	53.50	50.00
2x24	46.00	54.20	55.50	52.00
2x25	48.00	56.20	57.50	54.00
2x26	50.00	58.20	59.50	56.00
2x27	52.00	60.20	61.50	58.00
2x28	54.00	62.20	63.50	60.00
2x29	56.00	64.20	65.50	62.00
2x30	58.00	66.20	67.50	64.00
2x31	60.00	68.20	69.50	66.00
2x32	62.00	70.20	71.50	68.00
2x33	64.00	72.20	73.50	70.00
2x34	66.00	74.20	75.50	72.00

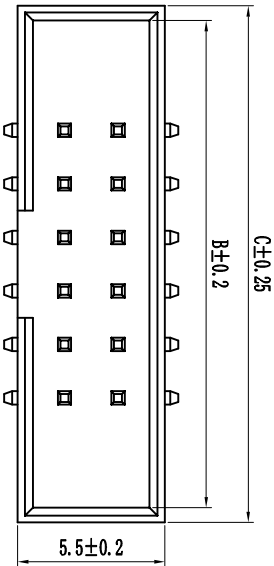

技术规范:

额定电流 : 1.5AMP
适用温度 : -40℃to+105℃
接触电阻 : 20mΩ Max
绝缘电阻 : 1000MΩ Min
耐电压 : AC500V
绝缘材料 : Polyester (UL94V-0)
Standard: PA-6T
端子材质 : Brass
电镀规范 : Au or Sn Over 50u" Ni

F a-10-1-2-5p-a-a-s-D-0									
排针系列	间距	插孔	单排	双排	Pin数	电镀	材质	角度	端子
a-0.5mm			1-单排	2-双排	1"40P/50P	A-10"	A-10T	S-180°	122.5mm间距25
b-1.0mm			2-双排	3-三排	2"40P/50P	B-50"	B-74.6T	R-90°	11.0mm间距18
c-1.27mm			3-三排	4-四排	3"40P/50P	C-50"	C-105T	R-90°	12.2mm间距22
d-2.0mm			4-四排		4"40P/50P	D-100"	D-79.6T	L-45°	100"非标准端子
e-2.5mm						E-150"	E-112T	L-45°	100"非标准端子
f-2.54mm						F-150"	F-112T	L-45°	100"非标准端子
g-3.0mm						G-180"	G-112T	S-180°	100"非标准端子
h-5.08mm						H-180"	H-112T	S-180°	100"非标准端子

注: 本规格以原厂计

2.0间距前牛, SMT, 塑高5.7mm 可带导柱

客户确认

Spec: 2.0mm Box Header, SMT
Positions: 10*100
Plastic Height: 5.7mm

上海狮拓电子科技有限公司



TOLERANCE:	
X. ±XXX	
X. ±0.20	
XX ±0.10	
ANG.	

產品名稱:
產品料號:

THIRD ANGLE PROJECTION

