

A

R O H S


页 码	文 件 编 号
1 OF 1	ST0-C0-051

■ Specifications(规格) :

- Current rating(额定电流) : 1A AC / DC
- Withstanding voltage(耐压值) : 500V AC/minute
- Temperature range(工作温度) : -40°C~+105°C
- Insulation resistance(绝缘电阻) : $\geq 1000M\Omega$
- Contact resistance(接触电阻) : $\leq 20m\Omega$

■ IDC

- Part No. (料号) : 4254IDYXXBKPTH01S2
- Poles (PIN数) : 06-64P
- Material (材质) : PBT+30% Glass Fiber (UL94V-0).
- Pin针: Bronze (青铜)
- Finish (电镀) : Contact-Plated (接触点镀金)
Bottom-Nickel (底部镀镍)

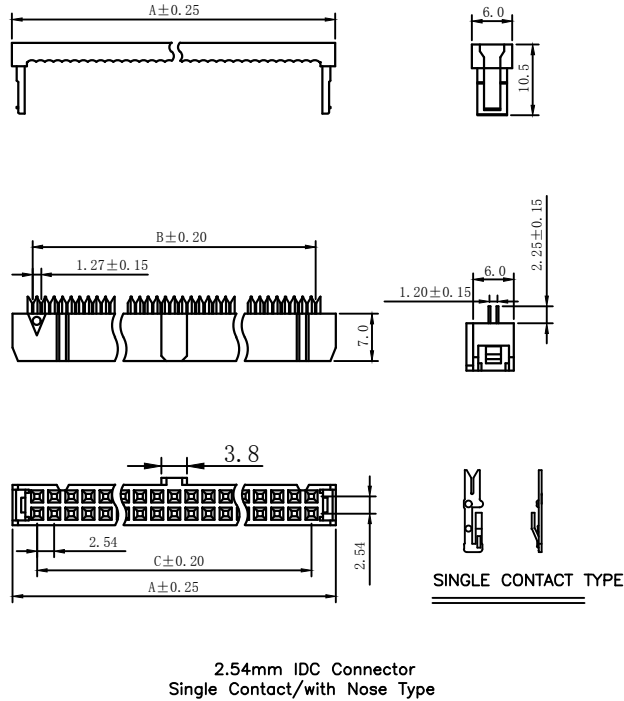

4254 I D Y XX BK PT H01- S2
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ①系列
②类别: I-IDC类
③外观
D-双排
④形态:
N-无鼻 Y-有鼻

- ⑤PIN数:
X XP位

- ⑥颜色:
BK-黑色 GG-灰 GA-灰A

- ⑦材质:
6 T - PA 6 T 9 T - PA 9 T 4 6 - PA 4 6
TS - 其它

- ⑧电镀类别: G * * - 镀金 V * * H * 镀全镀半金
* 0 1 - 1 U " * 0 2 - 2 U " * 0 3 - 3 U "
* 1 0 - 1 0 U " * 1 5 - 1 5 U " * 3 0 - 3 0 U "
N - 镀镍 (3 0 - 5 0 U ") S N - 镀亮锡 (3 0 - 5 0 U ")
S N 1 - 镀亮锡 (1 2 0 U " M i n .) S - 镀银
S W - 镀雾锡 H S - 高温锡
成品的件数
S2-二件式 S3-三件式

- ⑨空PIN位置及特殊码:

Circuit	Dimension			
	A	B	C	D
6	12.32	6.35	5.08	12.12
8	14.86	8.89	7.62	14.66
10	17.40	11.43	10.16	17.20
12	19.94	13.97	12.70	19.74
14	22.48	16.51	15.24	22.28
16	25.02	19.05	17.78	24.82
18	27.56	21.59	20.32	27.36
20	30.10	24.13	22.86	29.90
22	32.64	26.67	25.40	32.44
24	35.18	29.21	27.94	34.98
26	37.72	31.75	30.48	37.52
30	42.80	36.83	35.56	42.60
34	47.88	41.91	40.64	47.68
36	50.42	44.45	43.18	50.22
40	55.50	49.53	48.26	55.30
44	60.58	54.61	53.34	60.38
50	68.20	62.23	60.96	67.80
60	80.90	74.93	73.66	80.70
64	85.98	80.01	78.74	85.78

TOLERANCE:

X. $\pm XXX$

.X ± 0.20

.XX ± 0.10

ANG.

STO

上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名 _____

日期 _____

審核 _____

日期 _____

客戶確認

☐ 承認 _____ 日期 _____

☐ 駁回 _____ 日期 _____

4254IDYXXBKPTH01S2

XXP 2.54mm FC二件有凸半金1U