
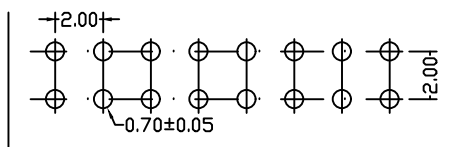
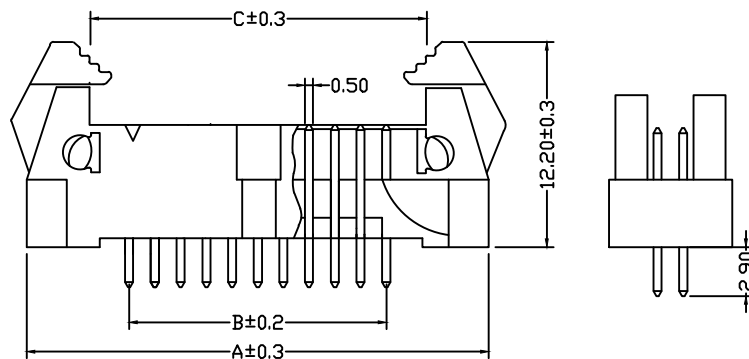


A

R O H S

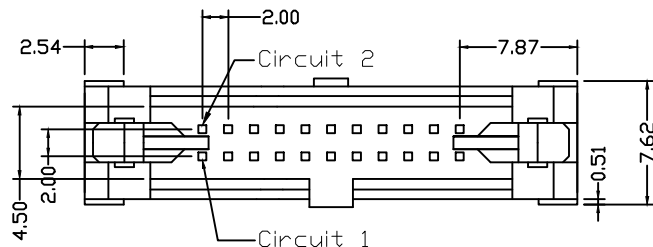

Recommend PCB Layout

■ Specifications(规格) :

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 2A AC / DC
- Withstanding voltage(耐压值): 1000V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ
- After environmental testing(环境测试后): ≤30mΩ

■ WAFER

- Part No.: 7200WVXXBKLPV01
- Poles: 10-50
- Material: LCP UL 94V-0

Finish(Pin): Gold-Flash

Material(Pin): Brass

7200 W V XX BK LP V01 X

①系列

②类别: W-Wafer类

③外观形态:

V-180° R-9 0° S-SMT

④PIN数:

X X

⑤颜色:

B K - 黑色

G Y - 灰色

⑥材质:

6 T - P A 6 T 9 T - P A 9 T 4 6 - P A 4 6

T S - 其它

⑦电镀类别: G * * - 镀金 V * * - 镀全金 S - 镀银

* 0 1 - 1 U " * 0 2 - 2 U " * 0 3 - 3 U "

* 1 0 - 1 0 U " * 1 5 - 1 5 U " * 3 0 - 3 0 U "

N - 镀镍 (3 0 - 5 0 U ") S N - 镀亮锡

S N 1 - 镀亮锡 (1 2 0 U " M i n .) S W - 镀雾锡

⑧空PIN位置及特殊码: H S - 高温锡

Poles	Dimensions (mm)		
	A	B	C
10	23.86	8.03	14.43
16	29.86	14.03	20.43
20	33.86	18.03	24.43
24	37.86	22.03	28.43
26	39.86	24.03	30.43
30	43.86	28.03	34.43
34	47.86	32.03	38.43
40	53.86	38.03	44.43
44	57.86	42.03	48.43
50	63.86	48.03	54.43

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

????

????

THIRD ANGLE PROJECTION



??
??
??
??

????

□?? ??

□?? ??

7200WVXXBKLPV01
XXP 2.0mm Ejector Header 180°