


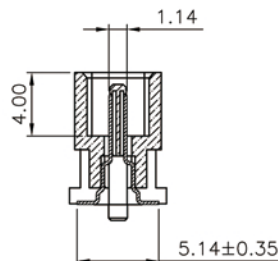
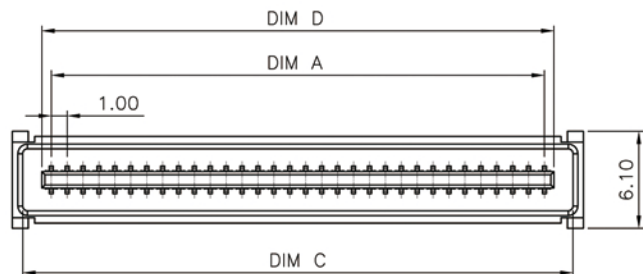


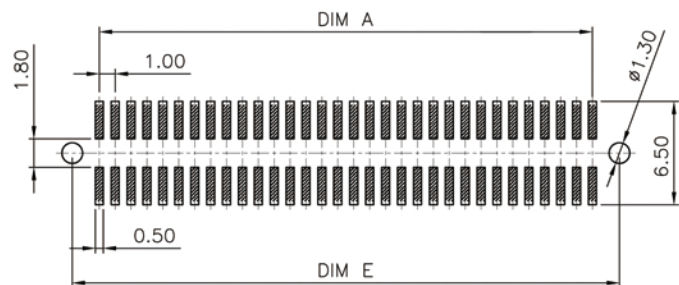


DIM E	DIM D	DIM C	DIM B	DIM A	PIN NO.	文件编码
52.40	50.20	52.60	53.90	49.00	2X50P	STOBTB100-250-002
34.40	32.20	34.60	35.90	31.00	2X32P	STOBTB100-232-002




剖面 A-A
比例 1: 1

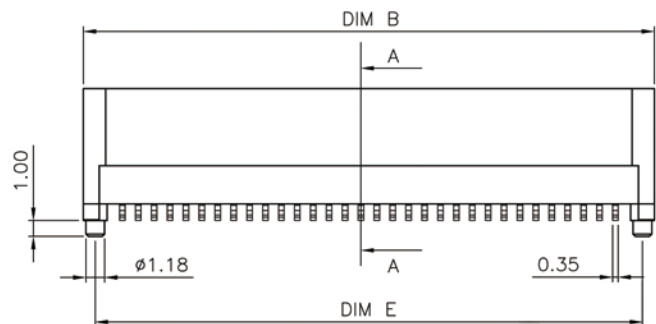

TOLERANCE: ± 0.05
RECOMMENDED PCB LAYOUT
(TOP VIEW)



装配合高

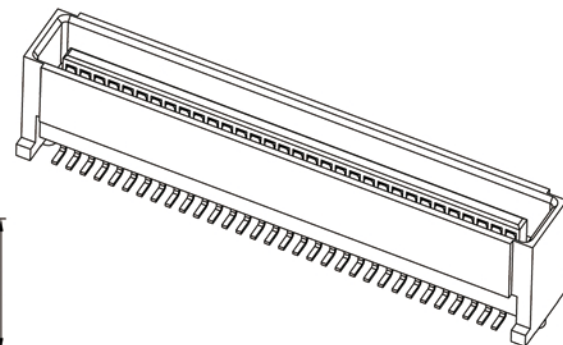

◆ 技术参数/Technical parameters

- 符合规范/Accord With Norm :EIA-364C
- 额定电流/Current Rating :1AMP
- 绝缘阻抗/Insulator Resistance :500M Ω Min.
- 接触阻抗/Contact Resistance :30m Ω Max.
- 耐电压值/Voltage Resistance :AC 250V
- 工作温度/Operating Temperature : -40°C To +85°C
- 金属材料/Metallic Material :Phosphor Bronze
- 金属处理/Metal Treatment :Au 3u", Sn 120u"
- 绝缘材料/Insulator Material :LCP UL94V-0
- 耐焊接热/Resistance To Soldering Heat :275° C $\pm$ 5° C 10S MAX

TOLERANCE:

X. $\pm$ XXX

.X $\pm$ 0.20

.XX $\pm$ 0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION

簽名 _____
日期 _____
審核 _____
日期 _____

客戶確認

☐ 承認 _____ 日期 _____

☐ 駁回 _____ 日期 _____

1.0mm 间距 板对板 插座
H=8.3 2*Nin, VERTICAL, SMT