


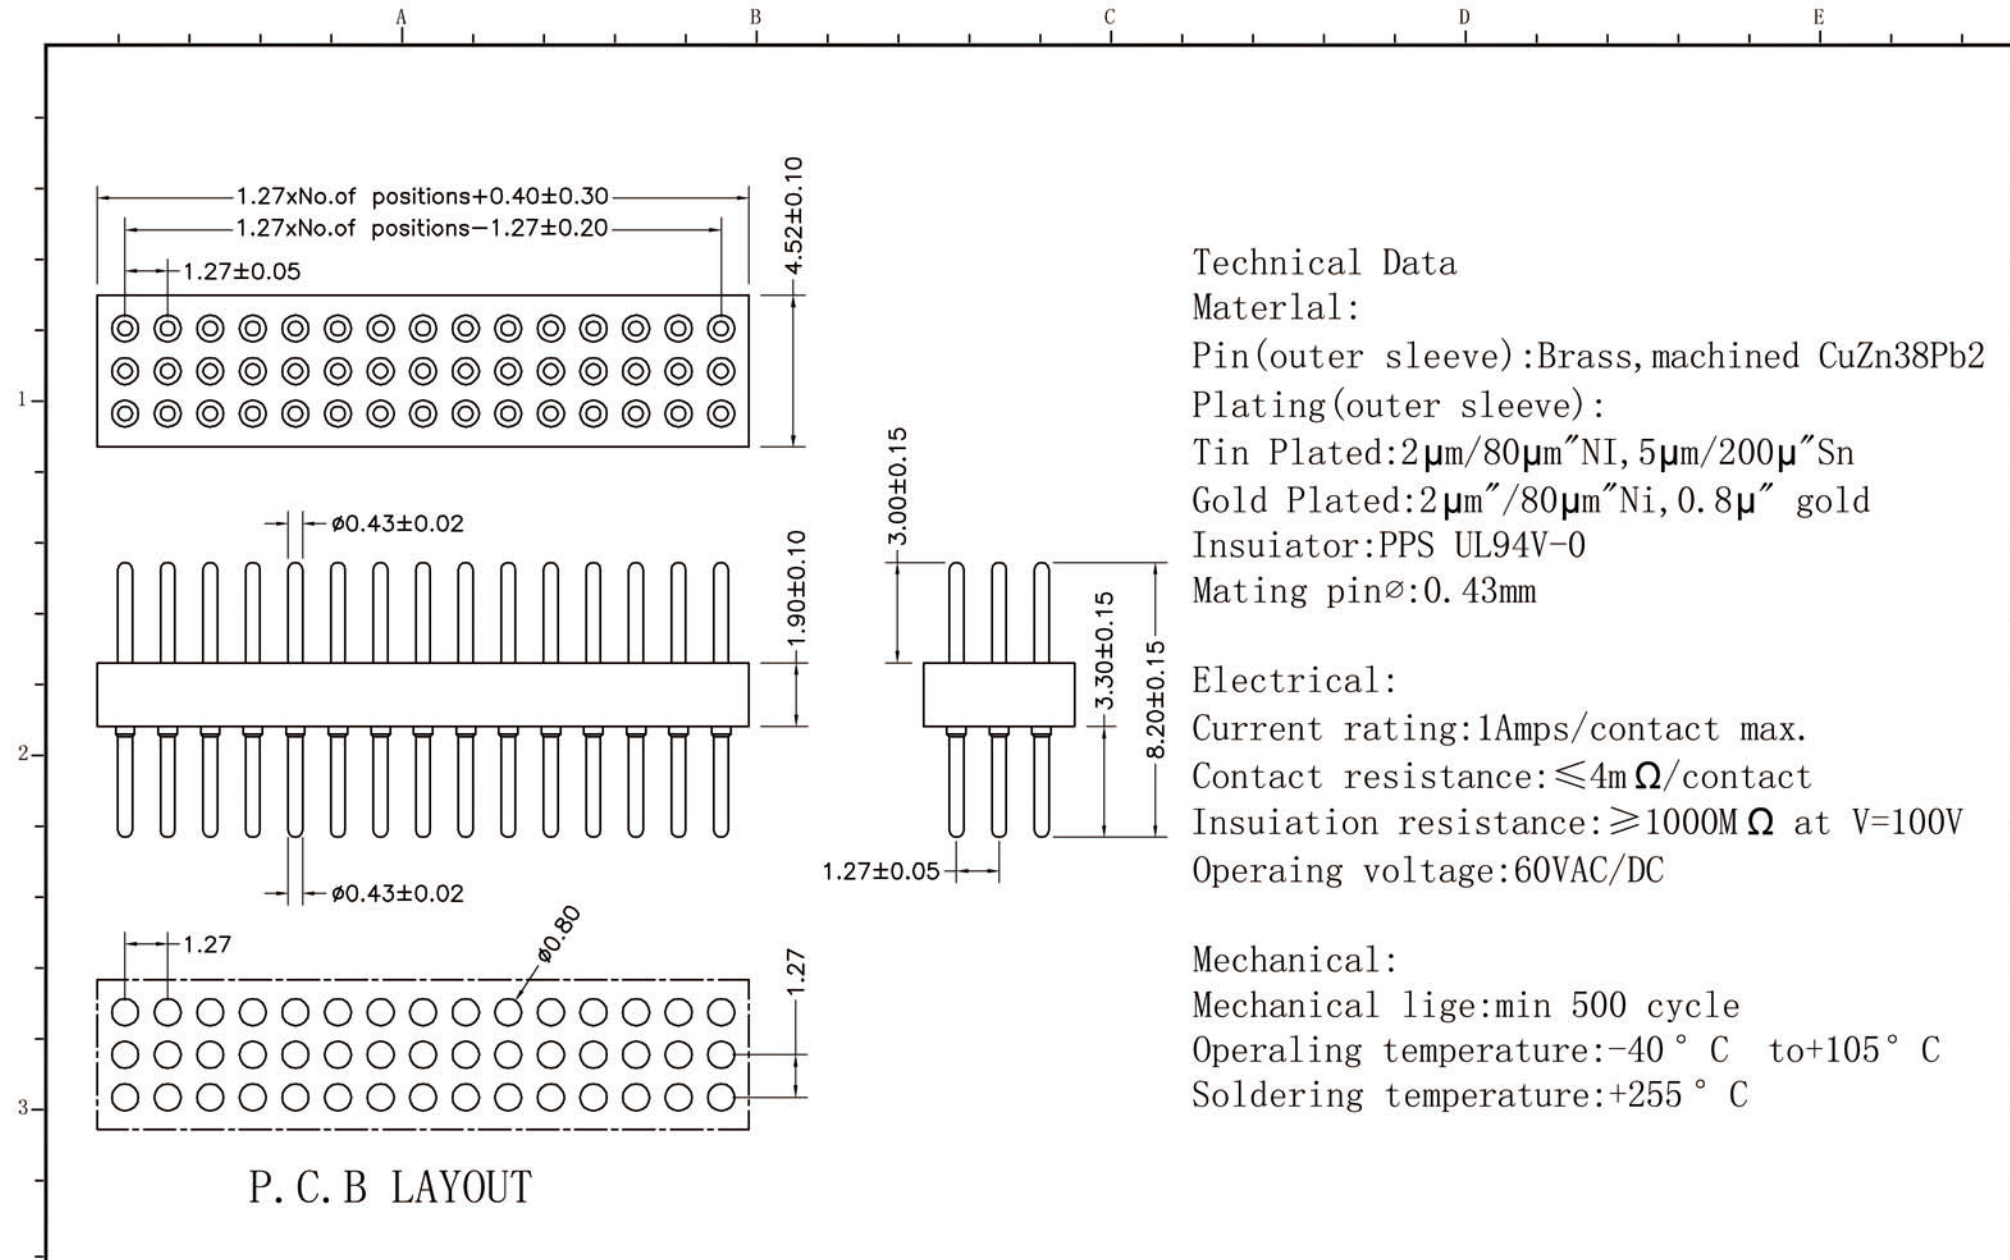

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated: $2\mu\text{m}/80\mu\text{m}''\text{Ni}$, $5\mu\text{m}/200\mu\text{m}''\text{Sn}$

Gold Plated: $2\mu\text{m}''/80\mu\text{m}''\text{Ni}$, $0.8\mu\text{m}''$ gold

Insuiator:PPS UL94V-0

Mating pin ϕ :0.43mm

Electrical:

Current rating:1Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega/\text{contact}$

Insuiation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Operaing voltage:60VAC/DC

Mechanical:

Mechanical lige:min 500 cycle

Operaling temperature: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+255^{\circ}\text{C}$

TOLERANCE:	STO	上海狮拓电子科技有限公司			簽名 _____	客戶確認	STOA3-DXXXX0820A
X. ±XXX					日期 _____		
.X ±0.20					審核 _____		
.XX ±0.10					日期 _____		
ANG.					日期 _____		
產品名稱:				THIRD ANGLE PROJECTION 	☐ 承認 _____ 日期 _____		
產品料號:					☐ 製圖 _____ 日期 _____		