


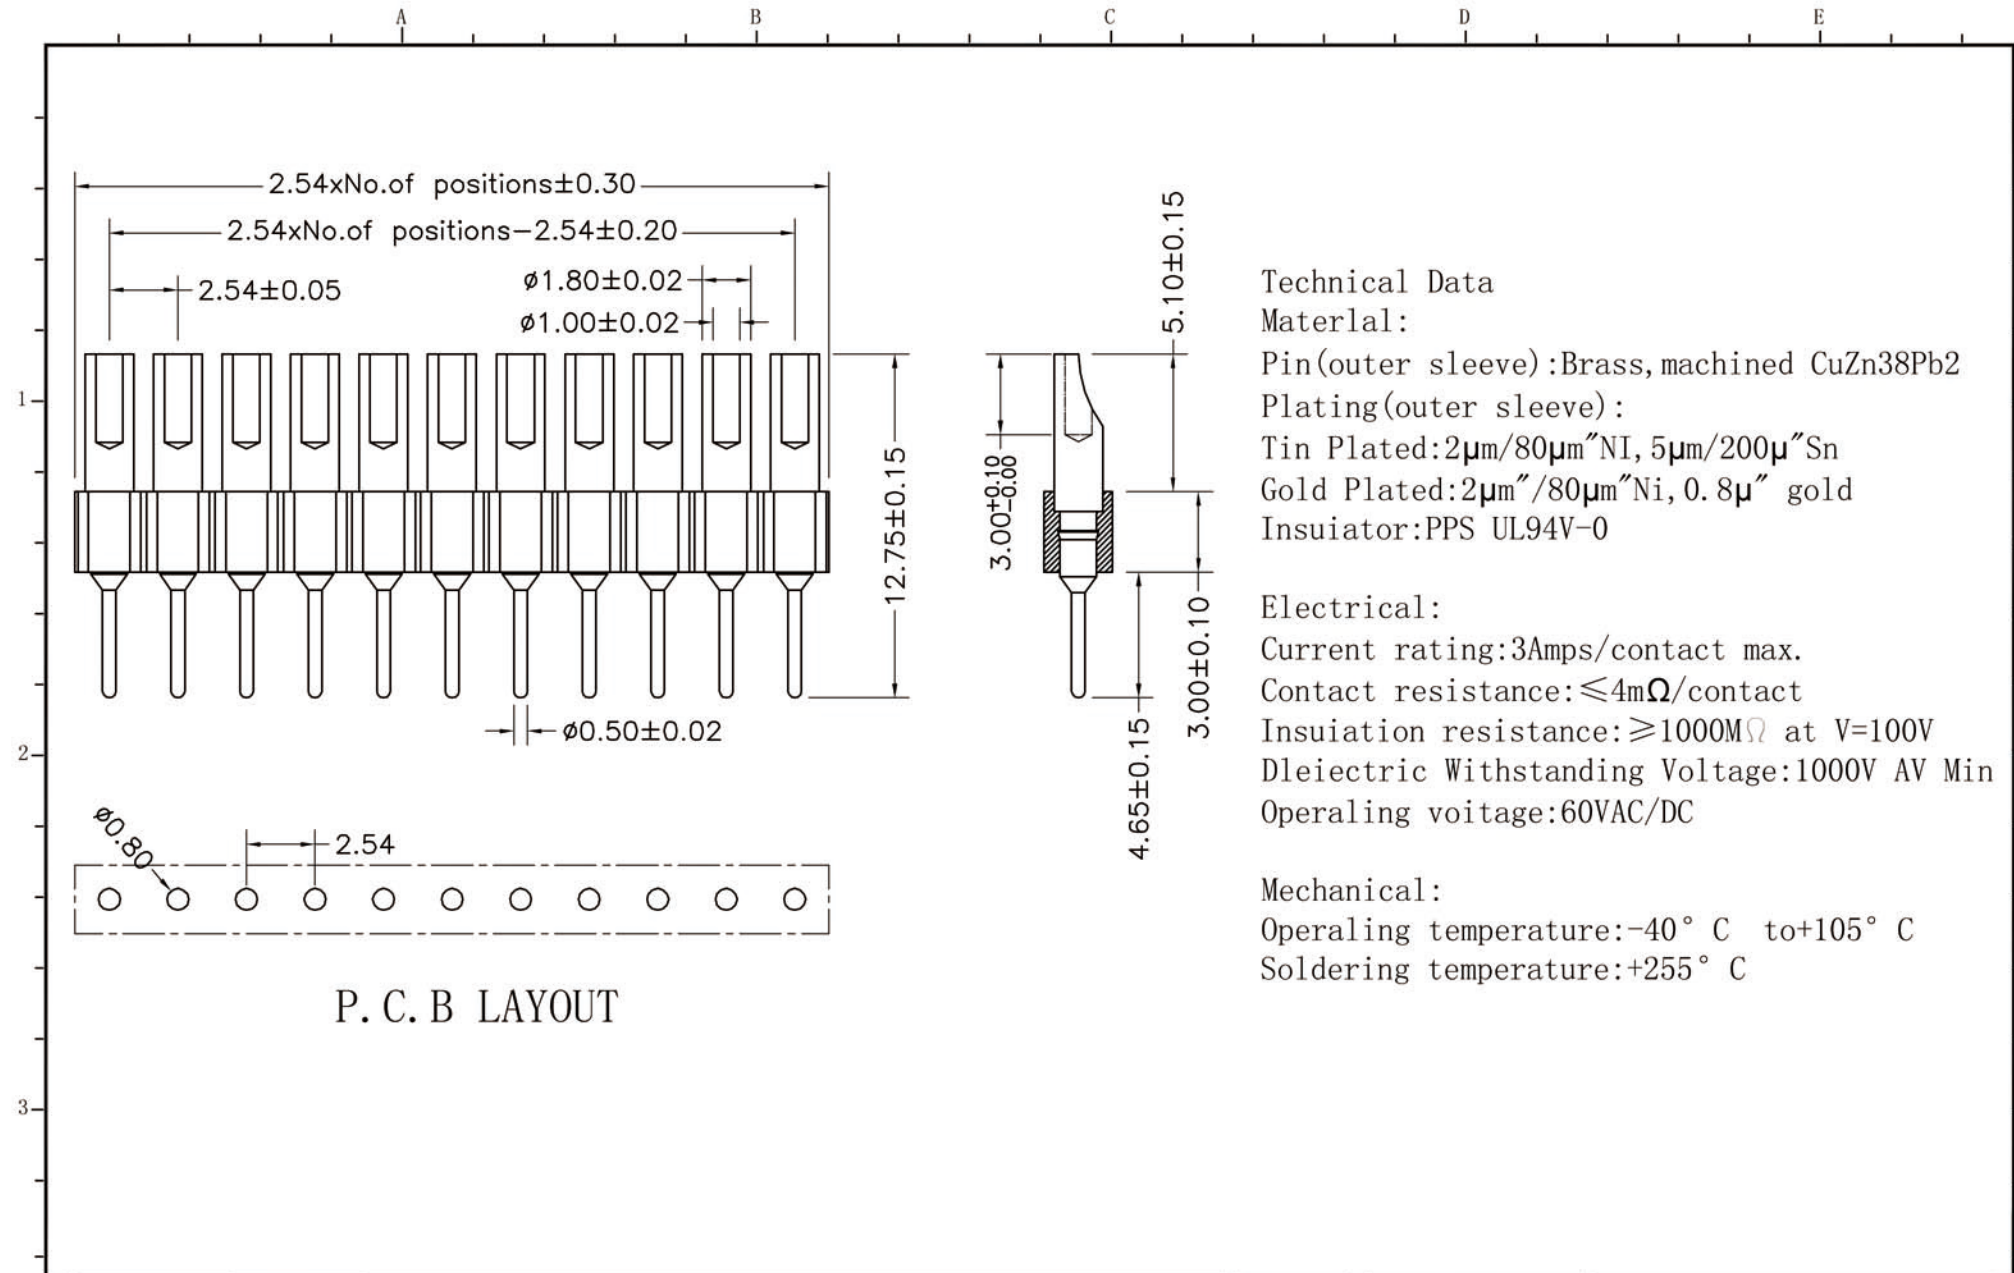

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated: $2\mu\text{m}/80\mu\text{m}$ "NI, $5\mu\text{m}/200\mu$ "Sn

Gold Plated: $2\mu\text{m}$ "/ $80\mu\text{m}$ "Ni, 0.8μ " gold

Insuiator:PPS UL94V-0

Electrical:

Current rating:3Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega$ /contact

Insuiation resistance: $\geq 1000\text{M}\Omega$ at V=100V

Dlelectric Withstanding Voltage:1000V AV Min

Operaling voitage:60VAC/DC

Mechanical:

Operaling temperature: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+255^{\circ}\text{C}$

TOLERANCE:

X. $\pm XXX$

.X ± 0.20

.XX ± 0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名 _____

日期 _____

審核 _____

日期 _____

客戶確認

☐ 承認 _____ 日期 _____

☐ 駁回 _____ 日期 _____

STOD1-DXXXX1275A