



A

B

C

D

E

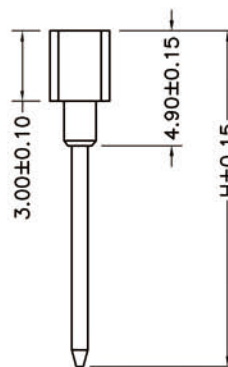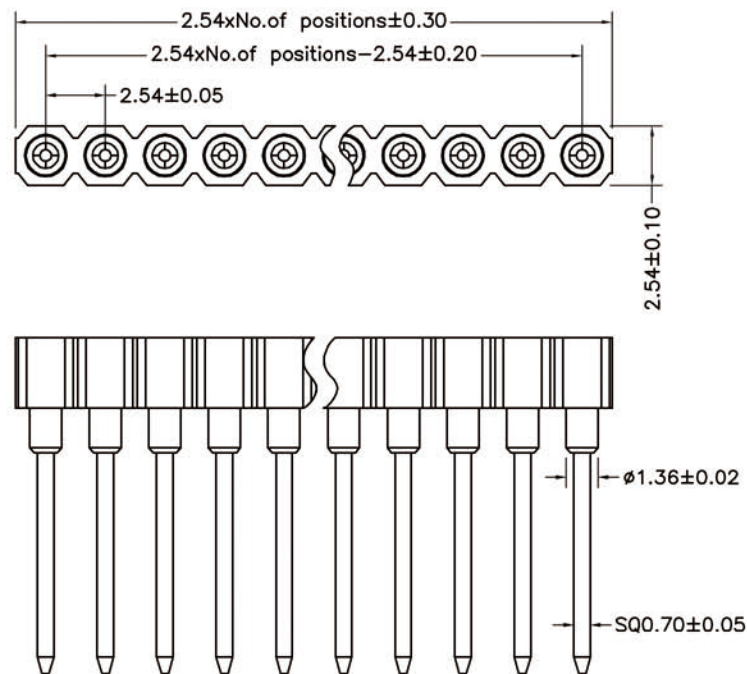

P. C. B LAYOUT

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2 μ m/80 μ m"NI, 5 μ m/200 μ "SnGold Plated:2 μ m"/80 μ m"Ni, 0.8 μ " goldPlating(Contact):2 μ m/80 μ m"NI, gold or Tin plated

Insuiator:PPS UL94V-0

Cllp(Contact 4 Flnger):Beryllium copper,heat teated

Electrlcal:

Current rating:3Amps/contact max.

Contact resistance: $\leq 4m\ \Omega$ /contactInsuiation resistance: $\geq 1000M\ \Omega$ at V=100V

Operaing voltage:60VAC/DC

Mechanical:

Average Insertlon force with steel pin of $\varnothing 0.432$:<270gAverage withdrawal force with steel pin of $\varnothing 0.432$:>90g

Mechanical lige cycle:min 200

Operating temperature:-40 ° C to+105 ° C

Soldering temperature:+255 ° C

PART NO	Pin Length H
D1-DXXXXXXX1150B-1	11.50
D1-DXXXXXXX1430B	14.30
D1-DXXXXXXX1780B-1	17.80

TOLERANCE:

X. ± 0.05 .X ± 0.20 .XX ± 0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名

日期

審核

日期

客戶確認

☐ 承認 日期☐ 駁回 日期

STOD1-DXXXXXXX1100B