
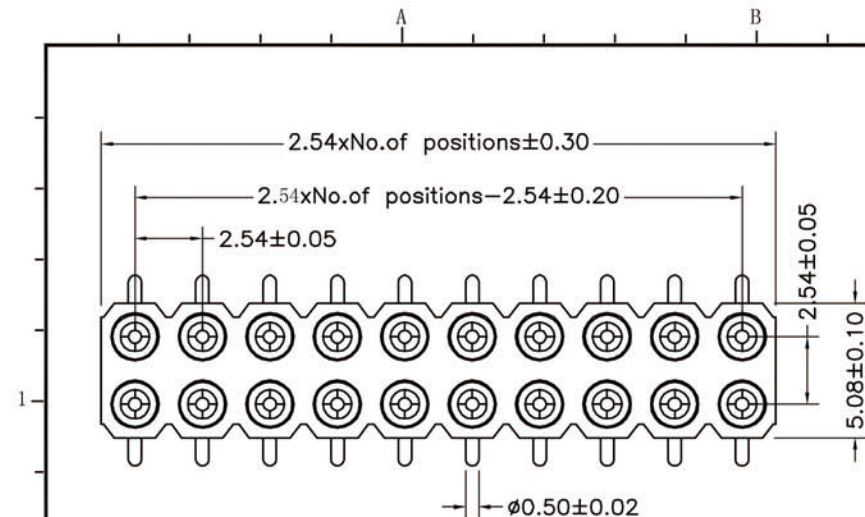


P. C. B LAYOUT



## Technical Data

### Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2 $\mu$ m/80 $\mu$ m"NI, 5 $\mu$ m/200 $\mu$ m"Sn

Gold Plated:2 $\mu$ m"/80 $\mu$ m"Ni, 0.8 $\mu$ m" gold

Plating(Contact ):2 $\mu$ m/80 $\mu$ m"NI,gold or Tin plated

Insuiator:PPS UL94V-0

Clip(Contact 4 Flnger):Beryllium copper,heat teated

### Electrical:

Current rating:3Amps/contact max.

Contact resistance: $\leq 4m\Omega$ /contact

Insuiation resistance: $\geq 1000M\Omega$  at V=100V

Dleiectrlc Withstanding Voltage:1000V AV Min

Operaling voltage:60VAC/DC

### Mechanical:

Average Insertlon force with steel pin of  $\varnothing 0.66mm/0.38"$ :<250g

Average withdrawal force with steel pin of  $\varnothing 0.66mm/0.38"$ :<70g

Mechanical lige cycle:min 200

Operaling temperature:-40 $^{\circ}$ C to+105 $^{\circ}$ C

Soldering temperature:+255 $^{\circ}$ C

TOLERANCE:

X.  $\pm XXX$

.X  $\pm 0.20$

.XX  $\pm 0.10$

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名

日期

審核

日期

客戶確認

☐ 承認 日期

☐ 駁回 日期

STOD2-SXXXXXX0743B