
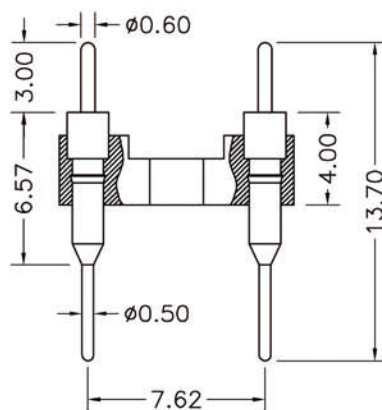


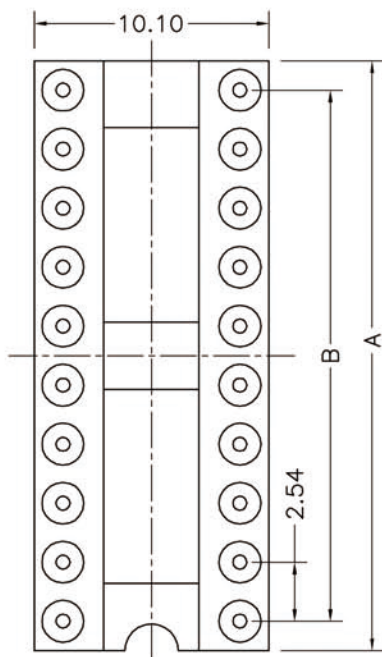

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μm~NI, 5μm/200μ~Sn

Gold Plated:2μm~/80μm~Ni, 0. 8μ~ gold

Insuiator:PPS UL94V-0

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insuiation resistance:≥1000MΩ at V=100V

Dlelectric Withstanding Voltage:1000V AV Min

Operaling voitage:60VAC/DC

Mechanical:

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

Serial number	No. of Positions	PART NO	A	B
1	6	STOD3-I106XX1370A	7.62	5.08
2	8	STOD3-I108XX1370A	10.16	7.62
3	10	STOD3-I110XX1370A	12.7	10.16
4	12	STOD3-I112XX1370A	15.24	12.7
5	14	STOD3-I114XX1370A	17.78	15.24
6	16	STOD3-I116XX1370A	20.32	17.78
7	18	STOD3-I118XX1370A	22.86	20.32
8	20	STOD3-I120XX1370A	25.4	22.86
9	22	STOD3-I122XX1370A	27.94	25.4
10	24	STOD3-I124XX1370A	30.48	27.94
11	28	STOD3-I128XX1370A	35.56	33.02

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名 _____
日期 _____
審核 _____
日期 _____

客戶確認

☐ 承認 _____ 日期 _____

☐ 駁回 _____ 日期 _____