
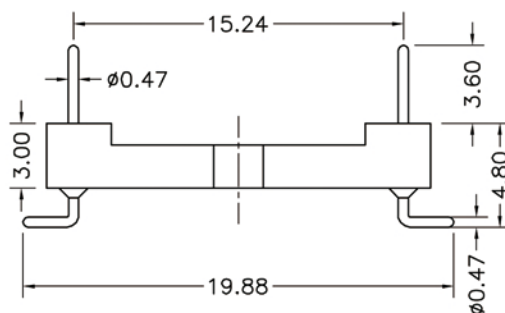


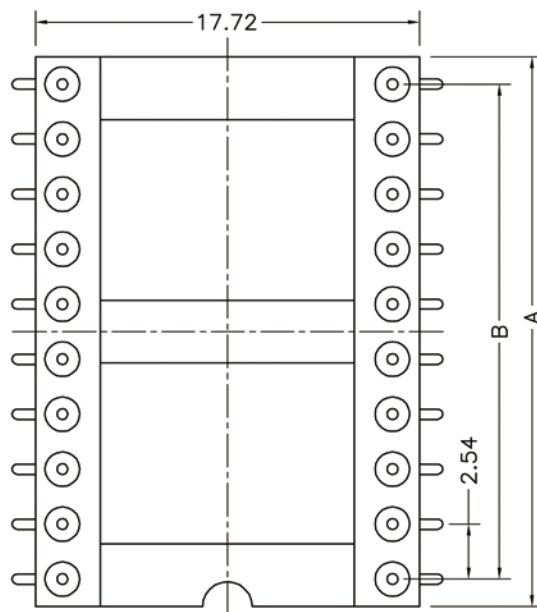

#### Technical Data

##### Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated: $2\mu\text{m}/80\mu\text{m}$  Ni,  $5\mu\text{m}/200\mu$  Sn

Gold Plated: $2\mu\text{m}/80\mu\text{m}$  Ni, 0.8 $\mu$  gold

Insuiator:PPS UL94V-0

##### Electrical:

Current rating:3Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega$ /contact

Insuiation resistance: $\geq 1000\text{M}\Omega$  at V=100V

Dlelectric Withstanding Voltage:1000V AV Min

Operaling voitage:60VAC/DC

##### Mechanical:

Operaling temperature: $-40^{\circ}\text{C}$  to $+105^{\circ}\text{C}$

Soldering temperature: $+255^{\circ}\text{C}$

| Serial number | No. of Positions | PART NO           | A     | B     |
|---------------|------------------|-------------------|-------|-------|
| 17            | 24               | STOD5-I324XX1000A | 30.48 | 27.94 |
| 18            | 28               | STOD5-I328XX1000A | 35.56 | 33.02 |
| 19            | 32               | STOD5-I332XX1000A | 40.64 | 38.1  |
| 20            | 36               | STOD5-I336XX1000A | 45.72 | 43.18 |
| 21            | 40               | STOD5-I340XX1000A | 50.8  | 48.26 |
| 22            | 42               | STOD5-I342XX1000A | 53.34 | 50.8  |
| 23            | 48               | STOD5-I348XX1000A | 60.96 | 58.42 |
| 24            | 50               | STOD5-I350XX1000A | 63.5  | 60.96 |
| 25            | 52               | STOD5-I352XX1000A | 66.04 | 63.5  |

TOLERANCE:

X.  $\pm\text{XXX}$

.X  $\pm 0.20$

.XX  $\pm 0.10$

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名 \_\_\_\_\_

日期 \_\_\_\_\_

審核 \_\_\_\_\_

日期 \_\_\_\_\_

客戶確認

☐ 承認 \_\_\_\_\_ 日期 \_\_\_\_\_

☐ 駁回 \_\_\_\_\_ 日期 \_\_\_\_\_