
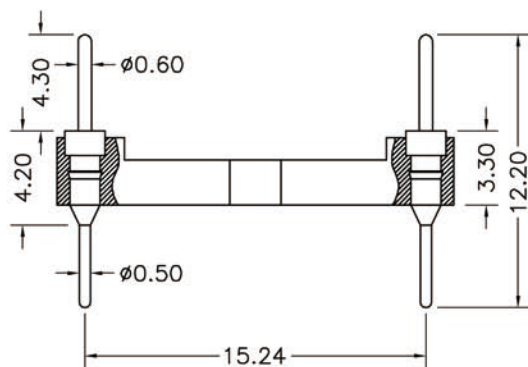


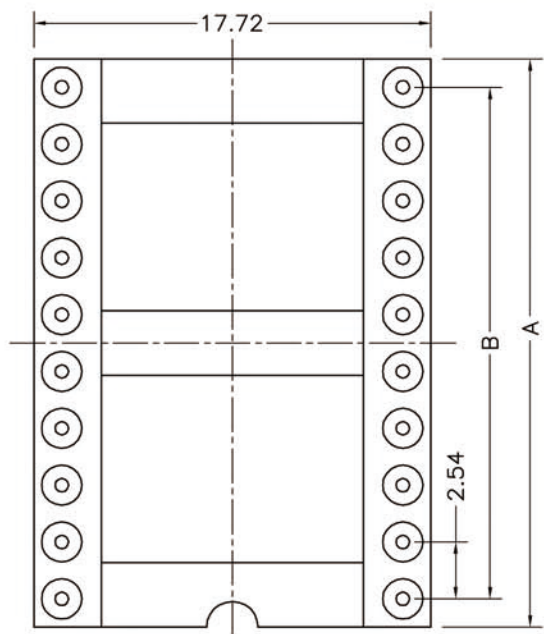

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μm"NI, 5μm/200μ"Sn

Gold Plated:2μm"/80μm"Ni, 0.8μ" gold

Insuiator:PPS UL94V-0

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insuiation resistance:≥1000MΩ at V=100V

Dlelectric Withstanding Voltage:1000V AV Min

Operaling voitage:60VAC/DC

Mechanical:

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

Serial number	No. of Positions	PART NO	A	B
17	24	STOD5-I124XX1220A	30.48	27.94
18	28	STOD5-I128XX1220A	35.56	33.02
19	32	STOD5-I132XX1220A	40.64	38.1
20	36	STOD5-I136XX1220A	45.72	43.18
21	40	STOD5-I140XX1220A	50.8	48.26
22	42	STOD5-I142XX1220A	53.34	50.8
23	48	STOD5-I148XX1220A	60.96	58.42
24	50	STOD5-I150XX1220A	63.5	60.96
25	52	STOD5-I152XX1220A	66.04	63.5

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名 _____

日期 _____

審核 _____

日期 _____

客戶確認

☐ 承認 _____ 日期 _____

☐ 駁回 _____ 日期 _____