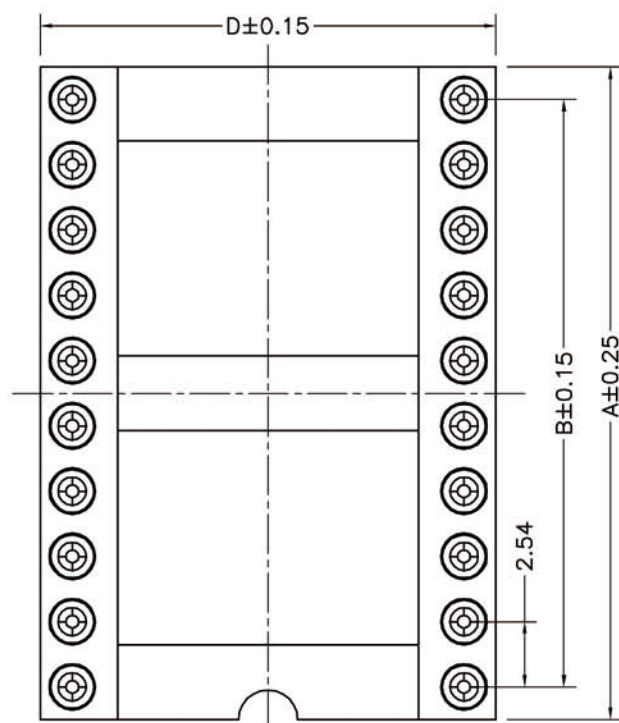


Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μm"NI, 5μm/200μ"Sn

Gold Plated:2μm"/80μm"Ni, 0.8μ" gold

Plating(Contact):2μm/80μ"NI, gold or Tin plated

Insuiator:PPS UL94V-0

ClIp(Contact 4 Flnger):Beryllium copper,heat teated

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insuiation resistance:≥1000MΩ at V=100V

Operaing voitage:60VAC/DC

Mechanical:

Average Insertion force with steel pin of ø0.432:<250g

Average withdrawal force with steel pin of ø0.432:>70g

Mechanical lige cycle:min 200

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

Serial number	No. of Positions	PART NO	A	B	C	D
17	24	STOD5-I124XXX0743B	30.48	27.94	15.24	17.7
18	28	STOD5-I128XXX0743B	35.56	33.02	15.24	17.7
19	32	STOD5-I132XXX0743B	40.64	38.1	15.24	17.7
20	36	STOD5-I136XXX0743B	45.72	43.18	15.24	17.7
21	40	STOD5-I140XXX0743B	50.8	48.26	15.24	17.7
22	42	STOD5-I142XXX0743B	53.34	50.8	15.24	17.7
23	48	STOD5-I148XXX0743B	60.96	58.42	15.24	17.7
24	50	STOD5-I150XXX0743B	63.5	60.96	15.24	17.7
25	52	STOD5-I152XXX0743B	66.04	63.5	15.24	17.7

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名

日期

審核

日期

客戶確認

☐ 承認 日期

☐ 駁回 日期