


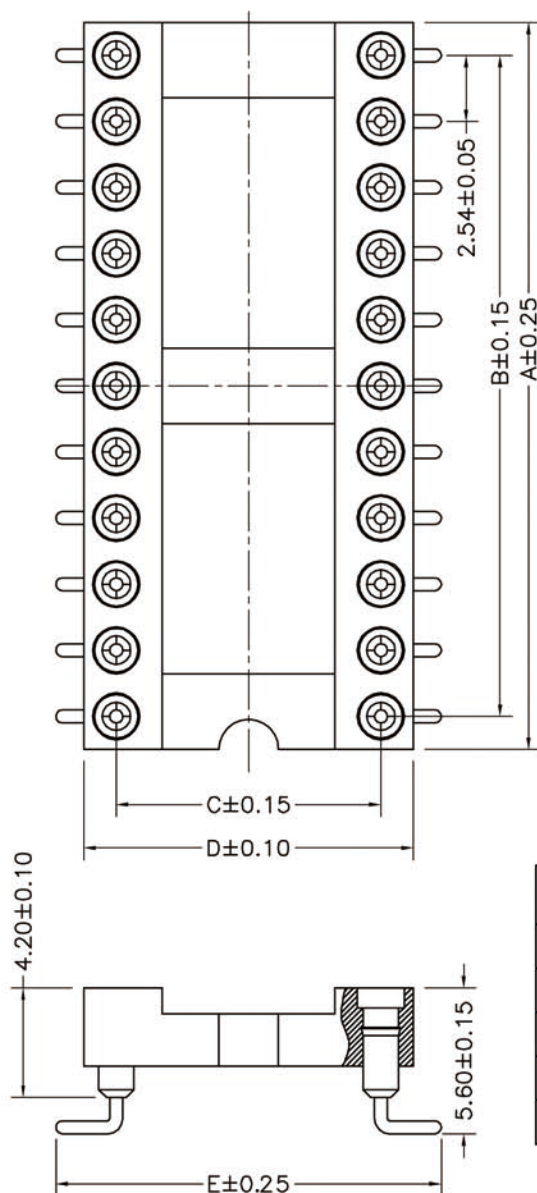

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μm"NI, 5μm/200μ"Sn

Gold Plated:2μm"/80μm"Ni, 0.8μ" gold

Plating(Contact):2μm/80μ"NI, gold or Tin plated

Insuiator:PPS UL94V-0

ClIp(Contact 4 Flnger):Beryllium copper,heat teated

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insuation resistance:≥1000MΩ at V=100V

Operaing voitage:60VAC/DC

Mechanical:

Average Insertion force with steel pin of ø0.432:<250g

Average withdrawal force with steel pin of ø0.432:>70g

Mechanical lige cycle:min 200

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

Serial number	No. of Positions	PART NO	A	B	C	D	E
12	20	STOD4-I320XXXX0740B	25.4	22.86	10.16	12.60	14.80
13	22	STOD4-I322XXXX0740B	27.94	25.4	10.16	12.60	14.80
14	24	STOD4-I324XXXX0740B	30.48	27.94	10.16	12.60	14.80
15	28	STOD4-I328XXXX0740B	35.56	33.02	10.16	12.60	14.80
16	32	STOD4-I332XXXX0740B	40.64	38.1	10.16	12.60	14.80

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名 _____

日期 _____

審核 _____

日期 _____

客戶確認

☐ 承認 _____ 日期 _____

☐ 駁回 _____ 日期 _____