


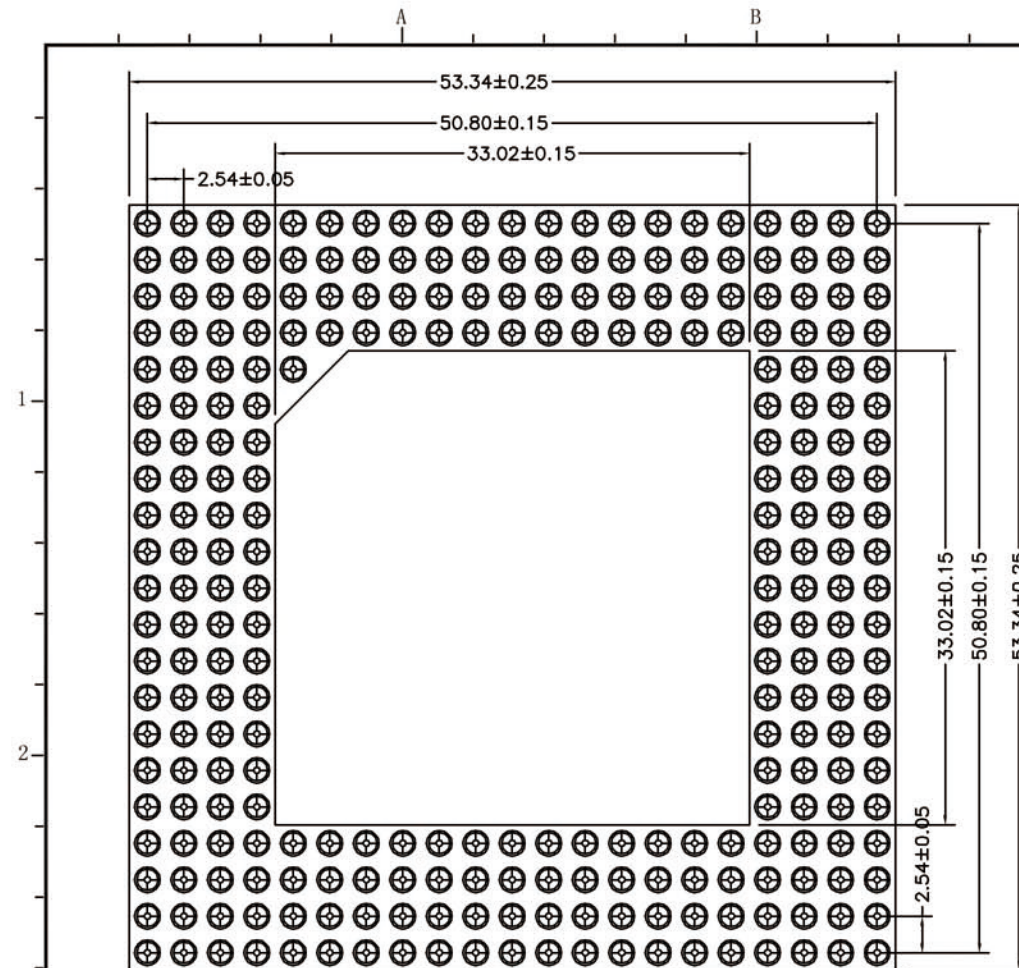

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated: $2\mu\text{m}/80\mu\text{m}^{\circ}\text{NI}$, $5\mu\text{m}/200\mu\text{m}^{\circ}\text{Sn}$

Gold Plated: $2\mu\text{m}^{\circ}/80\mu\text{m}^{\circ}\text{Ni}$, $0.8\mu\text{m}^{\circ}$ gold

Plating(Contact): $2\mu\text{m}/80\mu\text{m}^{\circ}\text{NI}$, gold or Tin plated

Insulator:PPS UL94V-0

ClIp(Contact 4 Flnger):Beryllium copper, heat teated

Electrical:

Current rating:3Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega/\text{contact}$

Insuiation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Operaing voitage:60VAC/DC

Mechanical:


Average Insertion force with steel pin of $\varnothing 0.432$: $< 250\text{g}$

Average withdrawal force with steel pin of $\varnothing 0.432$: $> 70\text{g}$

Mechanical lige cycle:min 200

Operaling temperature: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+255^{\circ}\text{C}$

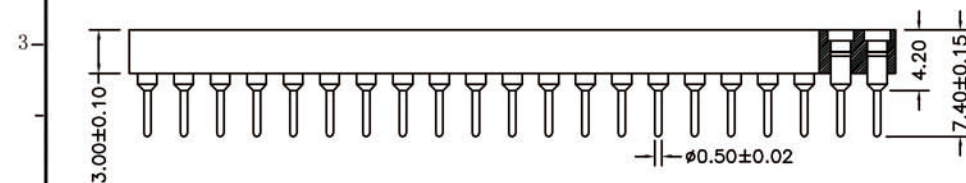

TOLERANCE:

.X. $\pm XXX$

.X ± 0.20

.XX ± 0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名 _____

日期 _____

審核 _____

日期 _____

客戶確認

☐ 承認 _____ 日期 _____

☐ 駁回 _____ 日期 _____

STOA-P273XXXX0740B