


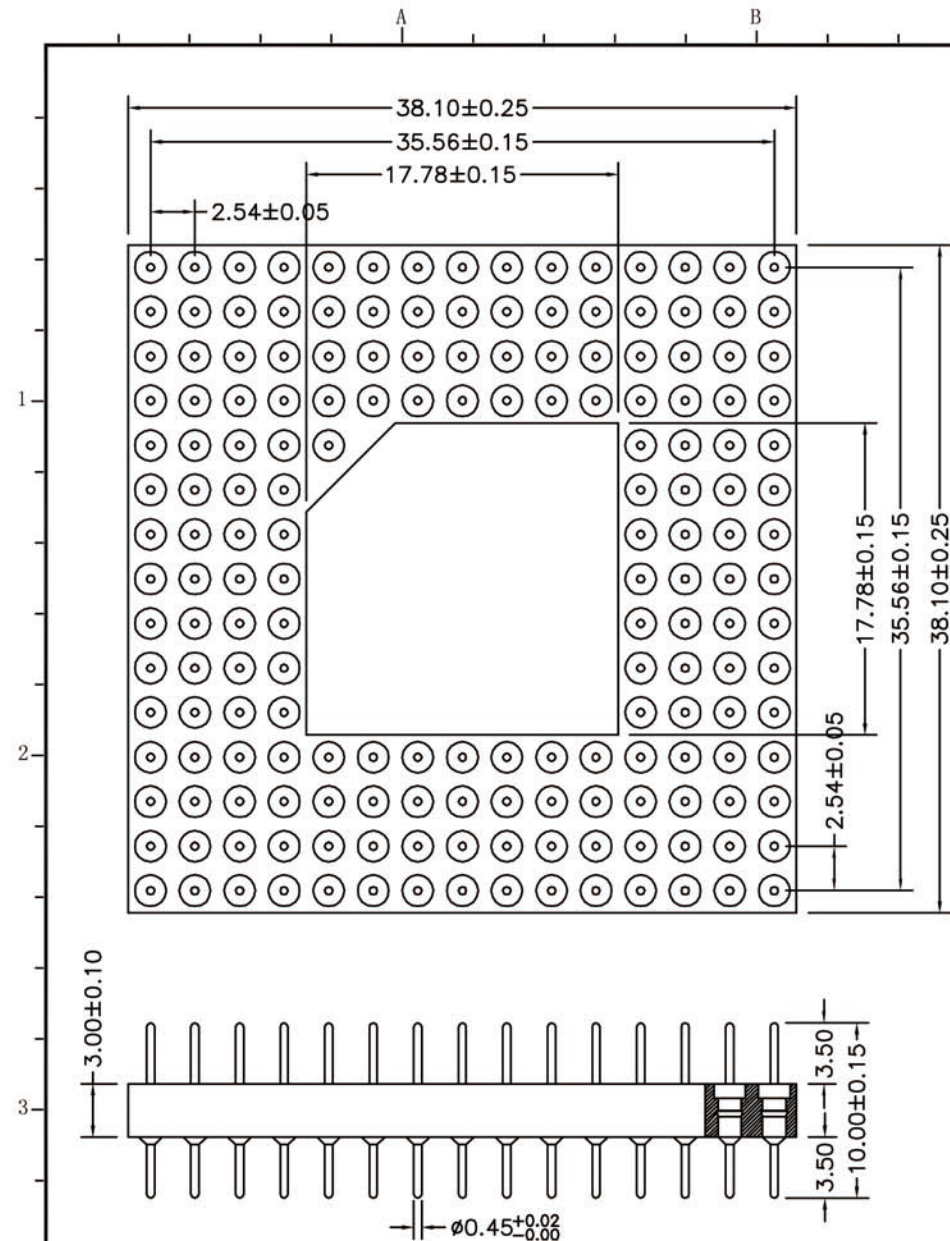

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated: $2\mu\text{m}/80\mu\text{m}''\text{Ni}$, $5\mu\text{m}/200\mu\text{m}''\text{Sn}$

Gold Plated: $2\mu\text{m}''/80\mu\text{m}''\text{Ni}$, $0.8\mu\text{m}''$ gold

Insulator:PPS UL94V-0

Electrical:

Current rating:3Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega$ /contact

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Operating voltage:60VAC/DC

Mechanical:

Operating temperature: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+255^{\circ}\text{C}$

TOLERANCE:	 上海狮拓电子科技有限公司	THIRD ANGLE PROJECTION 	簽名 日期 審核 日期	客戶確認 ☐承認 日期 ☐駁回 日期	STOA-P177XX1000A
X. ± 0.05					
.X ± 0.20					
.XX ± 0.10					
ANG.					