


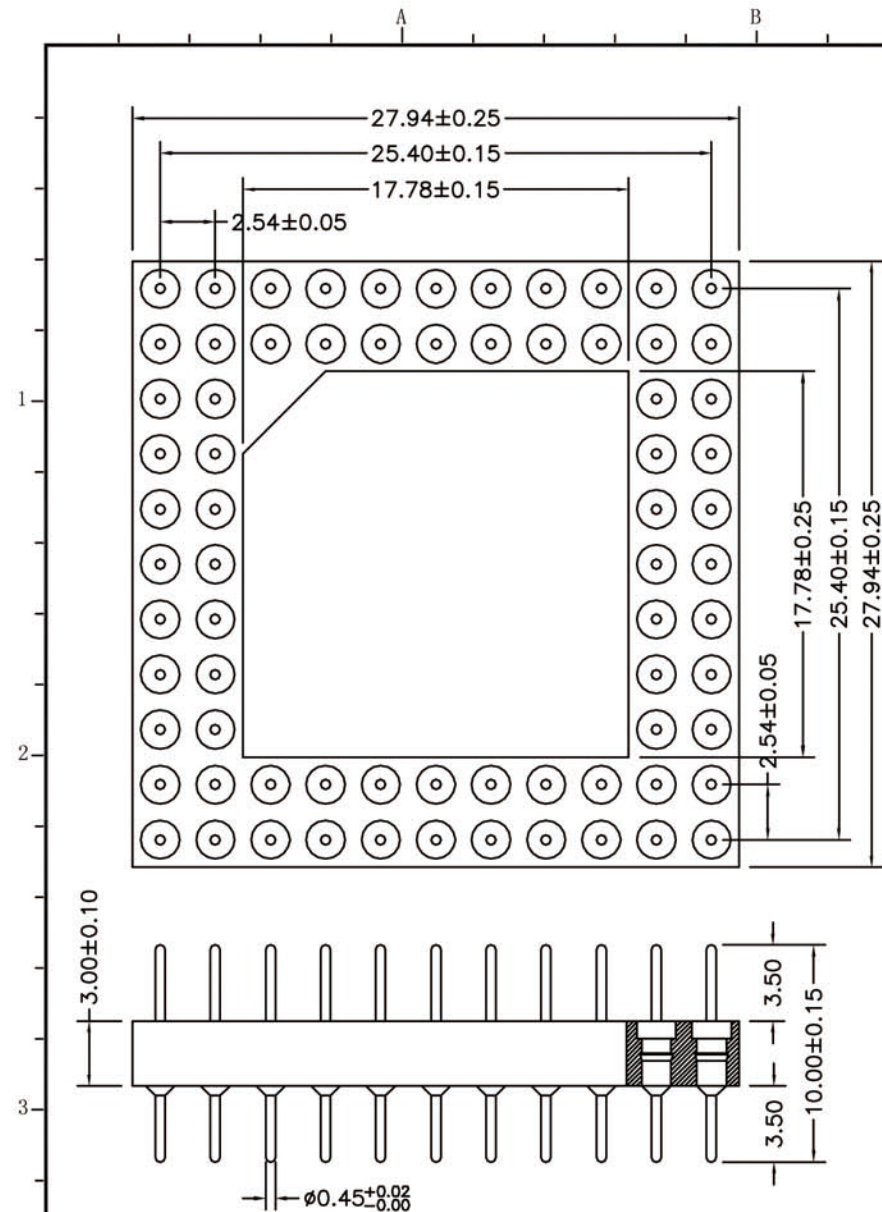

### Technical Data

#### Material:

Pin(outer sleeve): Brass, machined CuZn38Pb2

#### Plating(outer sleeve):

Tin Plated:  $2\mu\text{m}/80\mu\text{m}$  Ni,  $5\mu\text{m}/200\mu\text{m}$  Sn

Gold Plated:  $2\mu\text{m}$  /  $80\mu\text{m}$  Ni,  $0.8\mu\text{m}$  gold

Insulator: PPS UL94V-0

#### Electrical:

Current rating: 3Amps/contact max.

Contact resistance:  $\leq 4\text{m}\Omega$ /contact

Insulation resistance:  $\geq 1000\text{M}\Omega$  at  $V=100\text{V}$

Operating voltage: 60VAC/DC

#### Mechanical:

Operating temperature:  $-40^\circ\text{C}$  to  $+105^\circ\text{C}$

Soldering temperature:  $+255^\circ\text{C}$

TOLERANCE:

X.  $\pm 0.05$

.X  $\pm 0.20$

.XX  $\pm 0.10$

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名 \_\_\_\_\_

日期 \_\_\_\_\_

審核 \_\_\_\_\_

日期 \_\_\_\_\_

客戶確認

☐ 承認 \_\_\_\_\_ 日期 \_\_\_\_\_

☐ 駁回 \_\_\_\_\_ 日期 \_\_\_\_\_

STOA-P072XX1000A