




A

R O H S

页码	文件编号
1 OF 1	ST0-C0-132A

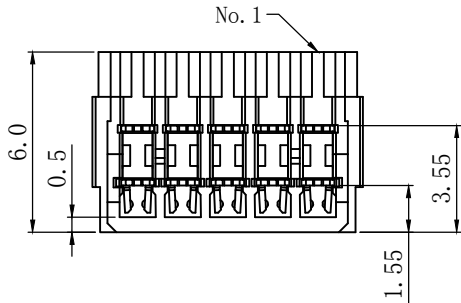

Specifications:

- Voltage rating: 50V AC/DC
- Current rating: 1A AC/DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -30° C ~ +105° C
- Insulation resistance: $\geq 100M\Omega$
- Contact resistance: $\leq 50m\Omega$
- Wire range: 26AWG
- Plastic material: PA66 UL 94V-0
- Terminal material: Phosphor Bronze
- Finish: Tin-Plated

0150 W XX A 5 9 00
① ② ③ ④ ⑤ ⑥ ⑦

①Series:

②Category: W-Wire B-Board



③Circuit number: XX PIN

④Plastic material and color:
A-b e i PA66

⑤Terminal material & finish:
5-Phosphor bronze bright tin plating

⑥Finish specification: 9-70~120U"

⑦Special code:

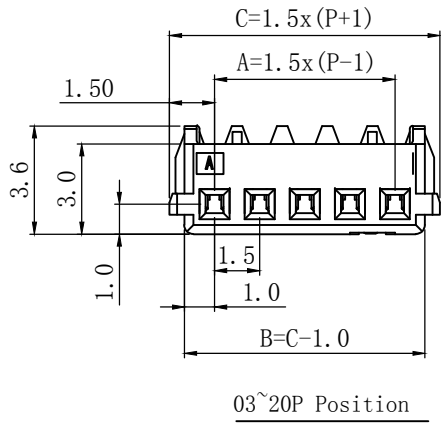

02P Position

TOLERANCE:

X. $\pm XXX$

.X ± 0.20

.XX ± 0.10

ANG.

STO

上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名

日期

审核

日期

客户确认

☐ 承认 日期

☐ 驳回 日期

0150WXXA5900

XXP 1.5mm Mini CT IDC Connector beige 26AWG