



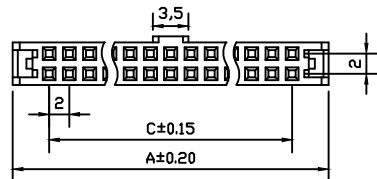



A

ROHS



■ Specifications(规格) :

- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤15mΩ

■ I DC

- Part No. (料号) : 4200IYXXBKPTH01S3
- Poles (PIN数) : 06-60P
- Material (材质) : PBT+ Glass Fiber (UL94V-0).

Pin针: Bronze (青铜)

Finish (电镀) : Contact-Plated (接触点镀金)

Bottom-Nickel (底部镀镍)

4200 I Y XX BK PT H01-S3 X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① 系列

② 类别: I-DC类

③ 外观形态:

N- 无鼻 Y-有鼻

④ PIN数:

XX-P位

⑤ 颜色:

BK - 黑色

GY - 灰色

⑥ 材质:

6T-PA6T 9T-PA9T 46-PA46 L P

TS - 其它

⑦ 电镀类别: G* *- 镀金 V* *H* 镀全镀半金

*01-1U" *02-2U" *03-3U"

*10-10U" *15-15U" *30-30U"

N - 镀镍(30-50U") SN - 镀亮锡(70

SN1 - 镀亮锡(120U" Min.) S - 镀银

SW - 镀雾锡 HS - 高温锡

⑧ 成品的件数

S2-二件式 S3-三件式

⑨ 空PIN位置及特殊码:

Circuit	Dimension		
	A	B	C
6	11.20	5.00	4.00
8	13.20	7.00	6.00
10	15.20	9.00	8.00
12	17.20	11.00	10.00
14	19.20	13.00	12.00
16	21.20	15.00	14.00
18	23.20	17.00	16.00
20	25.20	19.00	18.00
22	27.20	21.00	20.00
24	29.20	23.00	22.00
26	31.20	25.00	24.00
28	33.20	27.00	26.00
30	35.20	29.00	28.00
32	37.20	31.00	30.00
34	39.20	33.00	32.00
36	41.20	35.00	34.00
38	43.20	37.00	36.00
40	45.20	39.00	38.00
42	47.20	41.00	40.00
44	49.20	43.00	42.00
46	51.20	45.00	44.00
48	53.20	47.00	46.00
50	55.20	49.00	48.00
52	57.20	51.00	50.00
54	59.20	53.00	52.00
56	61.20	55.00	54.00
58	63.20	57.00	56.00
60	65.20	59.00	58.00

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.

ST

上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION

簽名

日期

審核

日期

客戶確認

承認 日期

駁回 日期

4200IYXXBKPTH01S3
XXP 2.0mm MFC三件有凸半金1U