


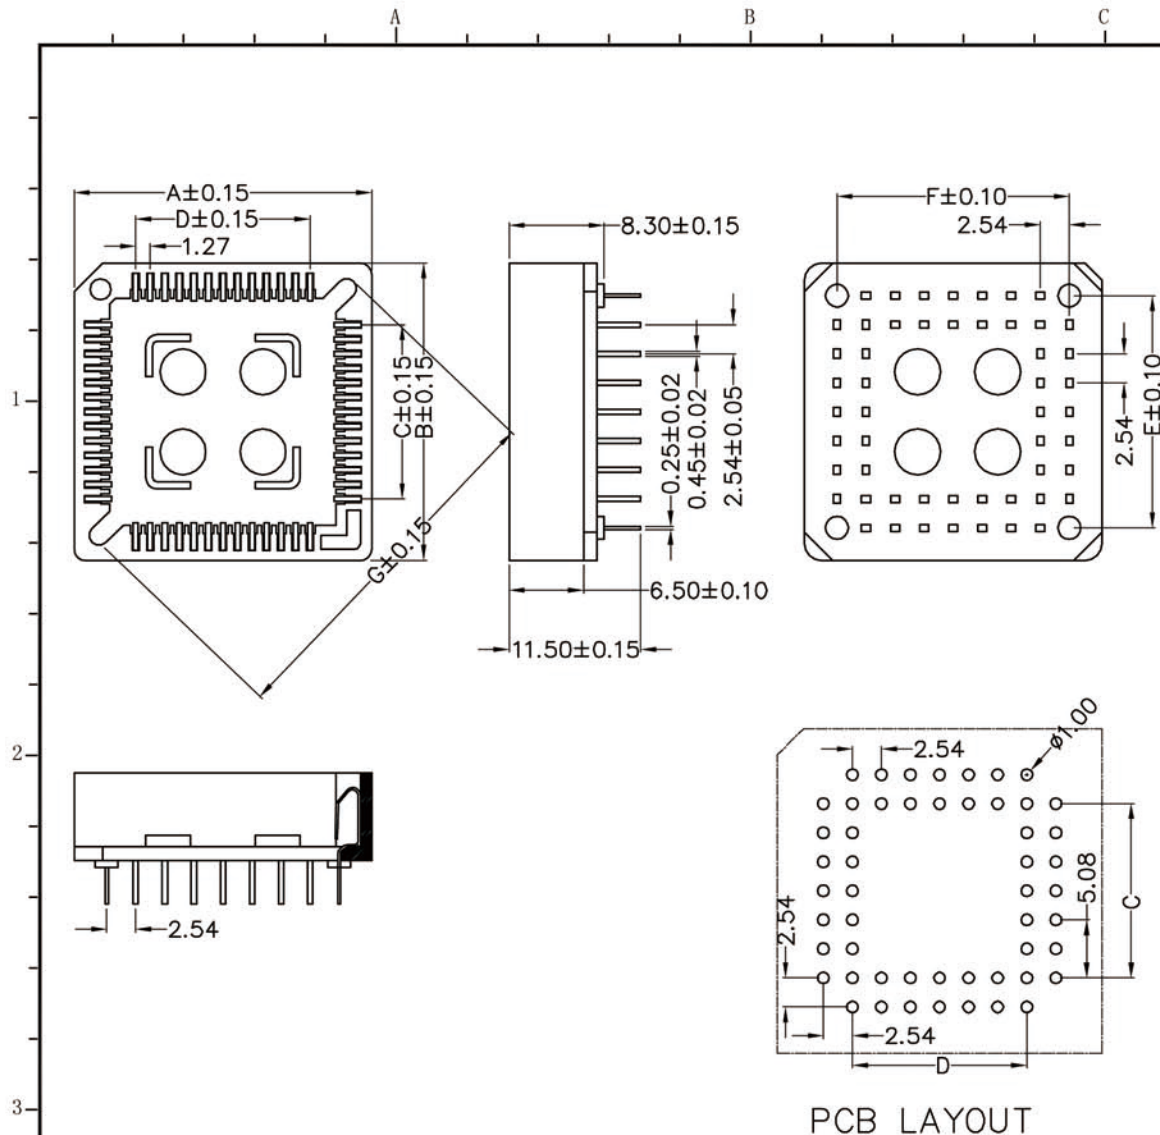

Technical Data

Material:

CONTACT::phosphor bronze

Plating(outer sleeve):

Tin Plated: $2\mu\text{m}/80\mu\text{m}$ Ni, $5\mu\text{m}/200\mu\text{m}$ Sn

Gold Plated: $2\mu\text{m}$ / $80\mu\text{m}$ Ni, $0.8\mu\text{m}$ gold

Insulator: PPS UL94V-0

Electrical:

Current rating: 2Amps/contact max.

Contact resistance: max $20\text{m}\Omega$

Insulation resistance: min $5000\text{M}\Omega$

Dielectric strength: min 600V RMS

Mechanical:

Contact pressure: min 1.5N per contact

Mechanical life: min 50 cycles

Operating temperature: -40°C to $+105^\circ\text{C}$

Soldering temperature: $+255^\circ\text{C}$

NO.OF CONTACTS	A	B	C	D	E	F	G
52P	25.80	25.80	15.24	15.24	20.32	20.32	30.80

TOLERANCE:

X. $\pm XXX$

.X ± 0.20

.XX ± 0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名
日期
審核
日期

客戶確認

☐ 承認 日期

☐ 駁回 日期

STOD-C252XXX011