
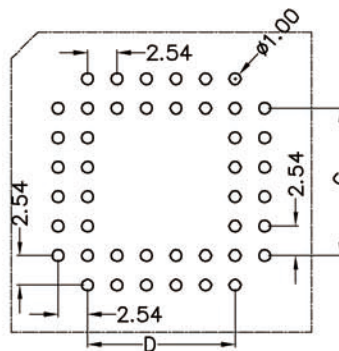

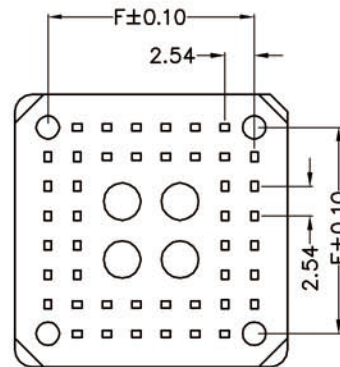


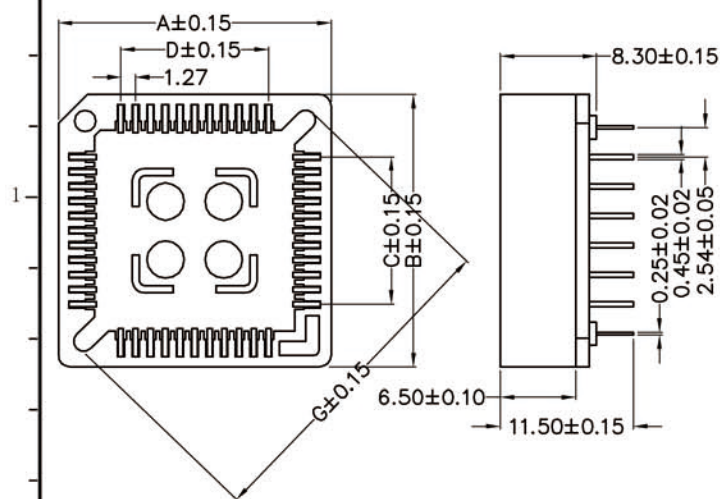

PCB LAYOUT

Technical Data

Material:

CONTACT::phosphor brone

Plating(outer sleeve):

Tin Plated:2 μ m/80 μ m"NI, 5 μ m/200 μ "Sn

Gold Plated:2 μ m"/80 μ m"Ni, 0.8 μ " gold

Insuiator:PPS UL94V-0

Electrical:

Current rating:2Amps/contact max.

Contact resistance:max 20m Ω

Insuiation resistance:min 5000M Ω

Dlelectric strength:min 600V RMS

Mechanical:

Contact pressure:min 1.5N per contact

Mechanical life:min 50 cycles

Operaling temperature:-40 $^{\circ}$ C to+105 $^{\circ}$ C

Soldering temperature:+255 $^{\circ}$ C

NO.OF	A	B	C	D	E	F	G
CONIACTS							
44P	23.20	23.20	12.70	12.70	17.78	17.78	27.20

TOLERANCE:

.X. $\pm$ XXX

.X $\pm$ 0.20

.XX $\pm$ 0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名
日期
審核
日期

客戶確認

☐ 承認 日期

☐ 駁回 日期

STOD-C244XXX010