

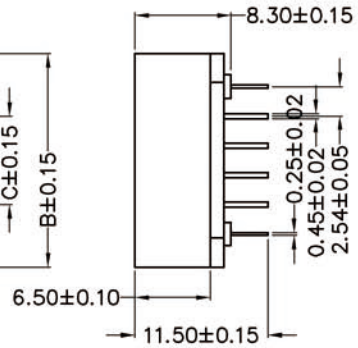







PCB LAYOUT

Technical Data
Materlal:
CONTACT::phocphor brone
Plating(outer sleeve):
Tin Plated:2μm/80μm″NI,5μm/200μ″Sn
Gold Plated:2μm″/80μm″Ni,0.8μ″ gold
Insuiator:PPS UL94V-0

Electrical:
Current rating:2Amps/contact max.
Contact resistance:max 20mΩ
Insuiation resistance:min 5000MΩ
Dleiectric strength:min 600V RMS

Mechanical:
Contact pressure:min 1.5N per contact
Mechanical life:min 50 cycles
Operaling temperature:-40° C to+105° C
Soldering temperature:+255° C

NO.OF CONIACTS	A	B	C	D	E	F	G
28P	14.98	14.98	7.62	7.62	12.70	12.70	20.45

TOLERANCE:			
X. ±XXX	STO	上海狮拓电子科技有限公司	
.X ±0.20	產品名稱:		
.XX ±0.10			
ANG.	產品料號:	THIRD ANGLE PROJECTION	

簽名 日期 審核 日期

客戶确認
□承認 日期
□駁回 日期

STOD-C228XXX009