
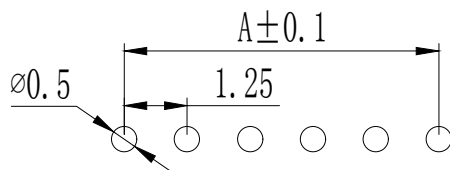
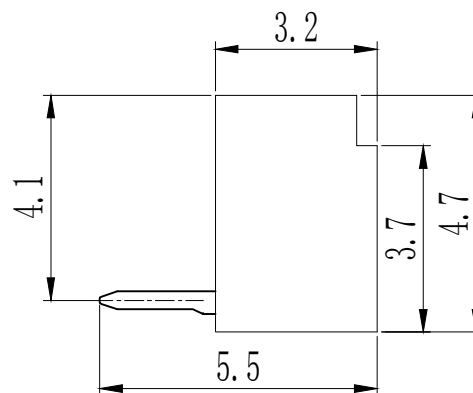
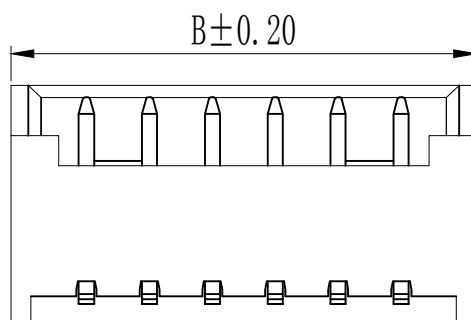


Pin数	尺寸A	尺寸B
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50
16	18.75	21.75
17	20.00	23.00
18	21.25	24.25
19	22.50	25.55
20	23.75	26.75
21	25.00	28.00
22	26.25	29.27
23	27.50	30.52
24	28.75	31.77
25	30.00	33.02
26	31.25	34.27
27	32.50	35.52

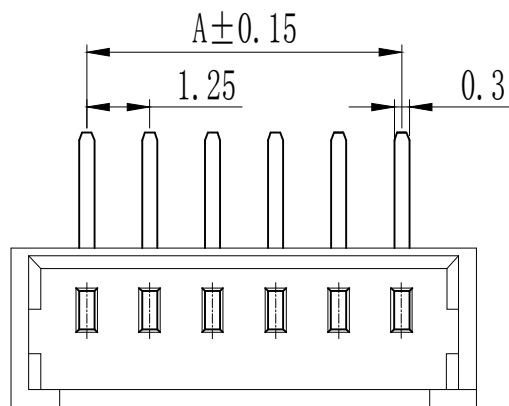

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆极数: 2~16 Poles: 2~16
- ◆适用线规: AWG#28-#32
Applicable Wire: AWG#28-#32
- ◆额定电压: AC, DC, 125V (有效值)
Voltage rating: AC, DC, 125V(rms)
- ◆额定电流: 1.0A, AC, DC
Current rating: 1.0A, AC, DC
- ◆耐压值: 250V AC/minute
Withstand voltage: 250V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

接触件 (TERMINAL)

- ◆插针: Phosphor Bronze
(Ni: 50u", Sn: 120u")
- ◆Wafer: Nylon66(白), UL94-V0

TOLERANCE:

X. $\pm XXX$

.X ± 0.20

.XX ± 0.10

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名

日期

审核

日期

客户确认

☐ 承认 日期

☐ 驳回 日期

1.25T-1-NAW