
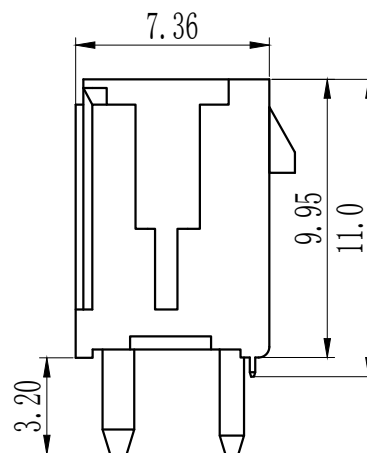
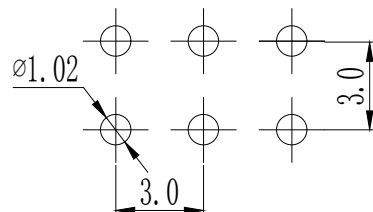
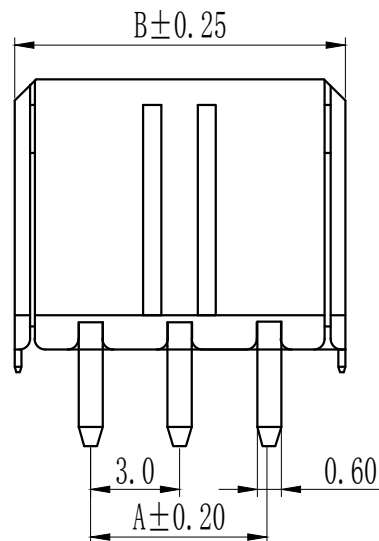


A
B
C
D
E
F
G
H
I

Pin数	尺寸A	尺寸B
1	--	6.70
2	3.00	9.70
3	6.00	12.70
4	9.00	15.70
5	12.00	18.70
6	15.00	21.70
7	18.00	24.70
8	21.00	27.70
9	24.00	30.70
10	27.00	33.70
11	30.00	36.70
12	33.00	39.70

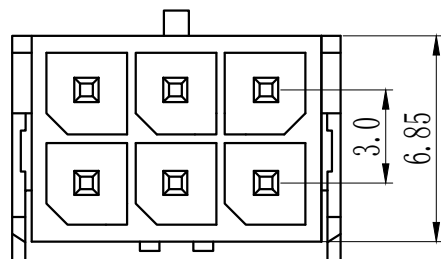

技术参数 SPECIFICATIONS

- ◆间距: 3.0 Pitch:3.0
- ◆适用线规: AWG#20-#24
Applicable Wire:AWG#20-#24
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 5A, AC,DC
Current rating:5A, AC,DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -40℃~+105℃
Working Temp:-40℃~+105℃
- ◆绝缘电阻: ≥100MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤10mΩ
Contact resistance:≤10mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0
- ◆接触针: 黄铜
Contact PIN: Brass

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

P.C.B LAYOUT

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名

日期

審核

日期

客戶確認

☐承認 日期

☐駁回 日期

3002-2×NA